



*A Field-Based Water Quality Testing Program
for Middle Schools and High Schools*



Massachusetts Water Resources Authority
Charlestown Navy Yard
100 First Avenue
Boston, MA 02129



*A Field-Based Water Quality Testing Program
for Middle Schools and High Schools*



Massachusetts Water Resources Authority
Charlestown Navy Yard
100 First Avenue
Boston, MA 02129

Developed for the MWRA by
The Writing Company
Watertown, MA 02172

ACKNOWLEDGMENTS

Principal Writers

Dr. Kenneth Mirvis and Cathryn Delude of The Writing Company in Watertown, MA

Pilot Teachers

Alice Apostolou, Tahanto Regional High School, Boylston, MA

Buck Harris, Dearborn Academy, Wakefield, MA

Carl Johnson, South Boston High School, Boston MA

Carol Lane, Quincy High School, Quincy, MA

Larry McGrail, West Boylston High School, West Boylston, MA

Joellen Rando, East Intermediate School, Weymouth, MA

Technical Consultant

George Buckley, Watertown High School, Watertown, MA

Workshop Coordination

Dr. Ardith Hoff, Maplewood Educational Consultants, Watertown, MA

Graphic Design and Illustrations

Mike Prendergast, Newburyport, MA

SUMMARY OF THE TESTS

Temperature: Water and air temperature are measured with a shielded Celsius thermometer.

pH: A relative measure of alkalinity/acidity. This test uses liquid reagent and a color comparator.

Dissolved Oxygen (DO): A measure of the amount of oxygen dissolved in water. This test uses a two-step procedure. In the first step, the sample is "fixed"; in the second, it is titrated to determine the level of DO in parts per million (ppm). The samples must be pH neutralized with an alkaline solution before disposal.

Biochemical Oxygen Demand (BOD): A measure of the oxygen-consuming organic matter in a water sample. The testing procedure for BOD is the same as for DO, except that the DO sample is fixed in the field then titrated immediately, while the BOD sample is left unfixed and stored for five days in the dark at room temperature. After five days, the sample is fixed and titrated. The results of the test are subtracted from the oxygen level found in the DO test, and the difference is BOD.

Nitrates: A measure of a common nutrient. In this test, several reagents are added to the sample. After twelve minutes of waiting time, the tester uses a color comparator to determine the level of nitrates in parts per million (ppm). The tested samples contain a cadmium residue and must be stored in a special container and returned to the MWRA for proper disposal.

Total Dissolved Solids (TDS) and Salinity: A measure of dissolved solids in a water sample. The test uses a digital meter that measures "micromhos," a measure of electrical conductivity. When measuring TDS (fresh water only), the meter reading must be multiplied by .5, which is a standard conversion factor. When measuring the salinity of sea water or brackish water, the sample must first be diluted with demineralized water; then the meter reading is multiplied by the level of dilution and the standard conversion factor.

Turbidity: A measure of water's cloudiness. This test measures turbidity by comparing a turbid sample to a clear sample, then adding drops of a special clouding solution to the clear sample until it appears as cloudy as the turbid sample. The results are measured in Jackson Turbidity Units (JTUs).

Total Coliform Bacteria: A simple presumptive test of the presence of total coliform bacteria. The test uses a lactose broth that changes color from purple to yellow after 48-hours of room-temperature incubation if coliform bacteria are present.

TABLE OF CONTENTS

I. Preface	
1. Introduction	7
2. Why the MWRA Provides this Program	8
3. Program Overview	9
4. Program Objectives	9
5. Target Audience	11
6. The Structure of Each Lesson	11
II. Introduction to Water	
1. Water: A Remarkable - Yet Limited - Substance	13
2. The Many Types of Water	14
3. Why is Water Quality Important and What Factors Affect Water Quality?	15
4. How Does Water Quality Testing Differ in Fresh Water and Salt Water?	16
III. Field Testing Procedures and Notes	
1. How to Select Sites	17
2. Safety Considerations	17
3. Performing Tests Safely	18
4. Choosing Sampling Locations	18
5. Work To Be Completed in the Field	19
6. Obtaining Permission from a Landowner	19
7. What Students Should Wear	20
IV. Pre-Site Visit Preparation	
1. Site Survey	21
2. Water Quality Predictions	24
3. Practice with Test Equipment and Procedures in the Classroom	25
4. Working in Groups	27
5. Additional Materials Recommended for the Field	28
6. Setting Up for Field Work	28

V. Post-Site Visit Follow-Up	29
VI. The Tests	
1. Temperature.....	31
2. pH.....	35
3. Dissolved Oxygen	39
4. Biochemical Oxygen Demand	47
5. Nitrates	49
6. Total Dissolved Solids and Salinity	55
7. Turbidity.....	61
8. Total Coliform Bacteria	65
VII. Forms and Handouts	
Student Safety	69
Site Survey Form	70
Prediction Form.....	71
Data Recording Form	73
VIII. References	75
IX. Contents of Kit.....	76
X. Purchasing Your Own Kit	77
APPENDIX: An explanation of the chemistry of the dissolved oxygen test.....	79



PREFACE

1. Introduction

Water quality has become an increasingly important issue during the past several decades. It is of concern in geographically water rich eastern Massachusetts, with our numerous rivers, streams, ponds, estuaries, and bays. Water quality provides a window on the health and vitality of the hundreds of local ecosystems within the 61 communities served by the MWRA.

Water quality provides a strong basis for educational inquiry. For example, how do the salinity, temperature and chemistry of an estuary change as the tide comes in, peaks and recedes, and what might this information tell us about the flushing action of the tides? Does industrial pollution affect a body of water? Do development and roadways have an impact on local water, and if so, what is that impact?

To help teachers bring these and other concepts related to water quality into their classrooms, the MWRA has developed this water quality testing program. It includes equipment for testing:

- Temperature
- pH
- Dissolved Oxygen (DO)
- Biochemical Oxygen Demand (BOD)
- Nitrates
- Total Dissolved Solids (TDS) and Salinity
- Turbidity
- Total Coliform Bacteria

This manual contains background information, lesson ideas, procedures, data collection and reporting forms, suggestions for interpreting the results, and extension activities.

It is important for teachers to bear in mind that *this is a field testing program*. As such, students will spend time in the field, performing tests on their community's water: oceans, marshes, rivers, bays, lakes, ponds, wetlands and streams. To succeed in the field, students must be assigned specific tasks, and they should practice field techniques in the lab or classroom before going into the field. Sections III and IV of this manual offer suggestions for making the field work successful and ensuring the students' safety.

This program is geared toward a broad student population: grades 6 - 12. We expect that educators will adapt these activities and lessons as necessary to make them suitable and appropriate for their students.

If, at any time, you have suggestions for additional activities, additional tests, or ways to improve this program, please submit your suggestions to the MWRA's School Program. We will make every effort to share them with other participating teachers.

To use the Water Quality Testing Kit, teachers must attend a full-day workshop. If you would like additional information about either the kit or a workshop, please call the MWRA at (617) 242-6000 and ask for the School Program.

The workshops for this program are free, six-hours long, and carry Continuing Education Units (CEUs). Once teachers have attended, they may sign up to borrow the kit at no charge (although a deposit may be required). Preference will be given to schools within the MWRA service area.

2. Why the MWRA Provides this Program

The MWRA provides safe, reliable drinking water and is up-grading sewage treatment for 2.5 million people and 5,500 industries. We make every effort to protect our region's water and watershed lands, and our efforts require many difficult public policy decisions. Ultimately, our success will be measured by the healthfulness of our water resources, the reliability of our water supply, the rates our customers must pay, and the ability of the entire region to work together to confront and solve difficult problems in the fairest and most technologically appropriate manner.

Our customers are well served by efforts to inform the public, which should begin in the schools. Today's young people will be tomorrow's decision makers and rate payers. They will be burdened with the responsibility of confronting and solving tomorrow's

problems, and we want to provide them with the tools they will need to make the best possible choices.

3. Program Overview

This testing program for fresh water and salt water consists of eight tests. It is designed for use by middle school and high school students. These tests, while simple and safe, require practice, care, and rigorous adherence to laboratory and safety procedures.

- ◆ *The kit contains some chemicals which, if mishandled, could be dangerous. Proper protective clothing, including rubber gloves, eye protection and lab aprons, is essential!*

In addition, this is a field testing program, with students performing at least some of the tests in the field. Field testing requires proper preparation. Students should know the test procedures before going into the field; they must also be aware of safe field practices and the potential dangers of working in the field. (Chapter 3 of this manual addresses field testing preparation.)

Students using this kit will be able to see a “snapshot” of the quality of a particular body of water. The most interesting and meaningful water quality data emerges when a particular body of water has been tested over time. Such long-term monitoring reveals changes over days, months and seasons. It could also reveal the presence of currently unknown sources of pollution. Long-term monitoring could result in an entire photo album, so you may want to undertake your own monitoring program over a number of years.

This manual contains all of the information you need to carry out the tests. It also contains a *Data Recording Form* that you may reproduce for students, as well as ordering information if you choose to purchase your own kit.

4. Program Objectives

- A. *To enable students to learn basic water quality tests and techniques.*
 - B. *To increase student awareness of the importance of water quality.*
 - C. *To increase student understanding of the factors that contribute to water quality.*
 - D. *To lead students to an understanding that each of us has responsibility for maintaining the quality of our water.*
- A. *To enable students to learn basic water quality tests and techniques.*

These tests will expose students to field testing techniques and lab methods. The results will be valid, even if they are not as accurate as more refined testing methods. In certain cases, we have chosen test equipment based on the technique it can

teach over the accuracy of results. For pH, for example, we could have selected a simple digital meter. While the results from the meter would have been more accurate, its use would convey little about lab methods. Instead, we have included two pH tests: a reagent/colorimeter test for more accurate testing results, and pH paper for spontaneous testing of liquids in the environment. We selected a digital meter for Total Dissolved Solids (TDS) and Salinity because it is the only reasonably simple test for TDS, and analyzing the results requires slightly more effort than simply reading numbers from a digital face. Likewise, the Dissolved Oxygen (DO) and Biochemical Oxygen Demand (BOD) tests use a standard process called the Winkler Method. Easier options exist, but we felt that the lab practice and technique made this a more valuable student exercise.

B. To increase student awareness of the importance of water quality.

Water quality is critical to human survival. Civilizations grew and flourished in areas with ample supplies of high quality water, and where water quality declined, those cultures either ended or faced the horrors of epidemics.

With the industrial revolution came changes in human-made pollution. For almost three centuries now, humans have tested the ability of the earth to adapt. While we have learned that the earth is highly adaptable, we have also learned that there are limits. Increased knowledge of diseases and the environment, and the resulting requirements of strict legislation, such as the Clean Water Act and the Safe Drinking Water Act, have compelled us to pay greater attention to and spend more money on the quality of our waterways. In the waning years of the twentieth century, it has become clear just how much a community depends on the quality of its water.

This program will help students become aware of the condition of the waterways within their own communities.

C. To increase student understanding of the factors that contribute to water quality.

Pure water - H_2O - is a laboratory concept. Because water is a "universal solvent," virtually everything around us affects the quality of our water. Atmospheric gases and contaminants dissolve in rainwater on its trip to earth. Once on the ground, water continues to dissolve a broad range of solids, gases and liquids. In addition, plant life, sunlight, nutrients and other variables affect the levels of oxygen and carbon dioxide in the water, and they in turn affect the plant and bacterial life. The digestive processes of animals introduce bacteria to water, and coliform bacteria serve as an effective indicator for other pathogens that might be dangerous to

humans. Fertilizers, natural and chemical, are washed into the waterways by rain, raising the level of nutrients, such as nitrogen, in the water, and the nutrients in turn promote the growth of algae and plant life.

High levels of algae and other non-dissolved solids block sunlight, and decreased sunlight leads to decreased photosynthesis, decreased plant life, and increased plant decay. These factors lead to lower oxygen levels, providing an important window on the overall health of our region's water.

D. To lead students to an understanding that each of us has responsibility for maintaining the quality of our water.

Water quality is affected by a wide range of factors, the most significant of which is human activity. Most human activities occur collectively, as part of the operations of society. While the impact of individual actions may seem insignificant, each individual can make an important contribution to water quality by not dumping harmful chemicals down the drain or onto the ground; by understanding the impact of pesticides and fertilizers; or by respecting the importance of wetlands and saltwater marshes. When massed together, these individual contributions can have a large positive effect.


5. Target Audience

This program is intended for use by middle school and high school students in a wide range of classes, such as chemistry, earth science, physical science, ecology, biology, and non-science disciplines. It could also be used in AP and special needs classes, with environmental clubs, or it could be integrated with other disciplines, such as government, geography, and social studies. In addition to being used at school, it is also appropriate for use by scout troops, clubs and other organizations.

6. The Structure of Each Lesson

In this manual, each test contains enough information to make it a full lesson. Each test unit contains the following sections:

- a. The Brief Summary section provides a quick glimpse into the test and test procedure.
- b. The Background section puts the lesson into context. What is the water quality issue under discussion? What factors might cause results to be out of the normal range? What are the implications of this test on humans and human health? Animals? Nature? Agriculture? Recreation? Industry?

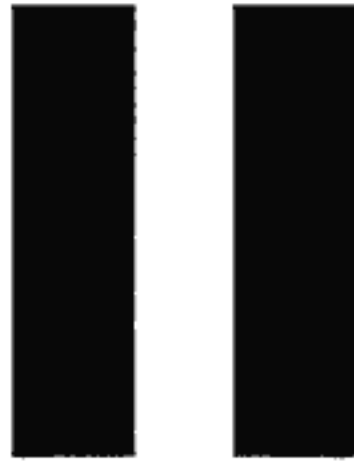

INTRODUCTION TO WATER

1. Water: A Remarkable – Yet Limited – Substance

All the water that has ever or will ever exist on earth is already here. Ninety-seven percent of that water is in the world's oceans; two percent is frozen; and less than one percent of the world's water is accessible fresh water! It is imperative that we zealously protect the earth's water supply. Once a water source, such as a river or ground water aquifer, is polluted, it could remain contaminated for a very long time. Protecting water is of the utmost importance because life on earth could not exist without water.

Water is one of the few substances on earth that may be observed in three forms simultaneously: solid, liquid and gas. It is not uncommon to look at a pond or stream in winter and see all three forms together: ice along the shore, liquid in the middle, and vapor rising from the surface or floating overhead in the form of clouds.

Water is the only substance that expands when it freezes rather than contracting. A volume of solid steel weighs more than an equal volume of molten steel. Ice, on the other hand, floats. Imagine how the world would differ if ice were heavier than water: as bodies of water froze, the ice would sink, sending warmer water to the surface where it too would freeze. Whole bodies of water would freeze solid, and life on earth as we know it could never have evolved. As it is, fortunately, a floating layer of ice protects underwater life from the severe cold rather than threatening it.

Water has an extremely high heat capacity. It can absorb and retain a great deal of thermal energy without undergoing dramatic temperature changes. As a result, oceans serve as highly effective buffers, protecting the earth's land mass from extreme temperature changes despite extreme fluctuations in the atmospheric climate.

Water has the highest surface tension of any liquid on earth except mercury, so it supports objects that are heavier than itself. Thus insects can "walk on water." This high surface tension also promotes "capillary action," which is why plants and trees can pull water "up" through their roots with no visible effort, seeming to defy gravity.

Water is the "universal solvent." What we generally think of as "water," therefore, is really a solution of many different chemicals. As a solvent, water is inert, so few of the chemicals that dissolve in water actually change its chemistry. As a result, water is a truly "renewable" resource that can almost always be separated from its solutes and salvaged for reuse.

2. The Many Types of Water

"Fresh" and "salt," "pure" and "clean" are all adjectives used to describe water. These distinctions are very important in a study of water quality.

The major division in the world of water is between "fresh" water and "salt" water. The terms address the total quantity of salts dissolved in the water. Sea water contains 35 parts per thousand (ppt) of dissolved salts. Fresh water contains measurable amounts of salts, but less than would make the water taste salty or destroy the quality of crop land. Many people consider water to be "fresh" if it contains less than one part per thousand of dissolved salts.

"Brackish" water contains more dissolved salts than "fresh" water and less than "sea" water. It has salt concentrations between 1 ppt and 35 ppt and is generally found in areas where fresh water and sea water meet, such as *estuaries*, which are mixing areas where rivers empty into the ocean. This program covers the testing of any type of water found in nature: fresh water, brackish water, and sea water.

"Pure" water is H₂O. Steam and distilled water are virtually "pure." When water evaporates in nature, it is pure for an instant, but contaminants immediately begin to dissolve in it. As a result, pure water may be produced in a laboratory, but it is virtually impossible to find in nature.

"Clean" water is a subjective term, the meaning of which depends on the intended use

of the water and on state and federal regulations. Drinking water may be considered “clean” if it does not contain toxic contamination or harmful bacteria. Lake or sea water may be considered “clean” if it appears clean (that is, it has low turbidity, or it allows a lot of light to pass through it); it may be considered “clean” if the level of toxicants in the water is sufficiently low to allow fish populations to thrive; or it may be considered “clean” if there are no unsightly algae blooms. In other words, “clean” has meaning in terms of a specific use, and it applies equally well to fresh and salt water.

3. Why Is Water Quality Important and What Factors Affect Water Quality?

All life forms on earth depend on water for survival. When the quality of the water is compromised, they may have problems surviving. Maintaining water quality, therefore, is essential to maintaining life on earth.

Almost everything we do affects water quality. Even our use of water at home can have a significant impact.

At home...

- If we use water wastefully, we could deplete the region’s water supplies. As the supplies diminish, the available water has less ability to dilute minerals and contaminants. Good water conservation practices are an important accompaniment to a water quality testing program such as this one.
- Lawn and garden chemicals - fertilizers, insecticides and herbicides - can run off into the storm drains and local waterways during storms.
- Household hazardous wastes, such as solvents, paints, waste oils, and other chemicals flushed down the drain or poured into storm drains quickly make their way to local waterways. The sewer system is designed to handle sewage - human and domestic waste products - not hazardous or toxic materials.
- Improperly maintained or overused septic systems or cesspools allow excess nitrogen and bacteria to enter the region’s water supplies.

In society...

- Larger scale lawn and garden chemical runoff - from parks, golf courses, and crop lands - enters the region’s waterways during each storm, raising the level of nutrients, such as nitrogen or phosphates, altering the pH, or contributing toxic chemicals, such as pesticides, that might harm the environment.

- Each rain washes road debris, such as oil, bits of tire rubber, and gasoline into the local waterways. This debris adds hydrocarbons and solids to the water, and often raises the turbidity.
- Industrial pollution threatens our waterways, adding a variety of contaminants, often in high concentrations, to our region's water.

4. How Does Water Quality Testing Differ in Fresh Water and Salt Water?

Whether your sample is fresh, sea, or brackish water, all of the tests contained in this kit work the same. The results of the test, however, may vary.

Temperature: Because of the ocean's size and currents, temperature ranges in sea water will generally be less dramatic than in inland water. Thermal pollution (from such sources as industrial cooling) will be apparent in both sea water and fresh water.

Dissolved Oxygen, Biochemical Oxygen Demand, pH, Turbidity: Temperature, water chemistry, sunlight, and plant life affect these factors.

Nitrates: Elevated nitrate levels generally result from chemical fertilizers. While nitrates are present in sea water, particularly in bays, estuaries, and harbors with sewage or agricultural runoff, they will generally be higher in fresh water, particularly around farms, parks, golf courses, and areas with many septic systems.

Total Coliform Bacteria: Coliform bacteria come from the intestines of warm-blooded animals and are found in both fresh water and sea water. You will probably find coliform bacteria in most samples of untreated water. This kit uses a simple presumptive test that merely indicates the presence of - not the quantity of - total coliform bacteria. Thus, you will not be able to discern whether or not they exist at dangerous levels.

Total Dissolved Solids and Salinity: Both of these tests use the same digital meter, but the procedures and the results differ. In fresh water, the total dissolved solids will be less than 1 ppt (1,000 ppm). Sea water from the open ocean has a salt concentration of about 35 ppt in the open ocean. (In Boston Harbor, the salinity varies from about 20 to 30 ppt because of tidal flows and the emptying of rivers.) Brackish water falls between the sea water and fresh water. The digital tester has a range of only about 950 ppm (or 1900 μ s), so sea water and brackish water must be diluted prior to testing.



Field Testing Procedures and Notes

1. How to Select Sites

Eastern Massachusetts offers many types of sites for collecting water samples: streams and rivers, lakes and ponds, fresh and salt water marshes, as well as bays, estuaries, harbors, and the ocean. Choosing from among these options should be a matter of convenience (what are you near?), safety (where can you collect samples safely?), and significance (what will have the most meaning for your class?).

If you select a site in your own community, you and your students may already know about convenient locations for taking samples, such as a swimming beach, boat launch or fishing dock. If you are interested in a site in another community, the town's municipal offices may be able to help locate a convenient access point.

2. Safety Considerations

Selecting a safe site may limit the places where you can collect samples. Find a site with enough room that all of your students will have easy access to the water. Your students should be able to collect samples without wading into the water. Before selecting a field site, inspect it yourself!

- Avoid places where the banks are slippery or steep, and where vegetation or rocks restrict access.

- Avoid places where the water moves swiftly or where waves are high.
- In estuaries, bays and along the sea shore, take the tides into account. A location that may look safe at low tide may pose dangers at high tide; a place that seems accessible at high tide may not be at low tide.
- Select sites that are removed from roads and highways. You do not want your students wandering into traffic - or traffic wandering into them!
- If you plan to collect samples from bridges, make sure the walkway is separated from the traffic and that there are safety rails on the bridge. (You will need ropes to haul up samples.) Students should not lean over the rails.
- If you use a boat, stress safety.

Before the site visit, give each student a copy of page 69 on *Student Safety*. It stresses the precautions for water safety practices and for doing the tests. If possible, take a chaperone along to help enforce these safety practices.

3. Performing Tests Safely

Performing the water quality tests requires handling both breakable equipment and hazardous chemicals. Students should practice the same safety precautions in the field as they do in the laboratory.

The kit contains Material Safety Data Sheets (MSDS) for each chemical. These contain all the safety information you will need, including dangers, treatments and disposal.

- Each student should have the proper protective equipment: aprons, gloves and eye protection.
- Be sure to have enough clean water on hand to flush chemicals in case of an accident.
- Dispose of chemicals properly.
- Have your students practice handling the equipment before the field test. (See *Chapter IV, Pre-Site Visit Preparation*, page 21.) They must be particularly cautious not to drop or break the equipment.

4. Choosing Sampling Locations

Test results will vary depending upon your sampling location. For example, the temperature, dissolved oxygen and turbidity level of water from the middle of a lake or harbor may differ from samples taken at the shore, and water from near the surface may differ

from water taken at mid-depths or from the bottom.

Safety and strategic considerations will probably prevent you from collecting samples at all locations. Nevertheless, you can achieve the goals of this program and relay a valuable educational lesson by taking samples at more accessible locations. Students will experience the hands-on science involved in the field tests, and they will become aware of the interconnections between water quality issues and human use. As part of your follow-up discussion, you can hypothesize how the water quality might differ at different locations.

If you have a choice of sampling locations, one may be more “representative” than another. For instance, water taken from a steep bank or a dock would probably be more indicative of the whole pond or bay than water in a shallow, protected cove. Testing samples from both sites might provide valuable comparisons.

5. Work To Be Completed in the Field

To ensure accurate results, only a few tests must be completed in the field. Once these tests are completed, you may bring the remaining sample water to the classroom to complete the tests.

The following tests are the only ones that must be completed in the field:

- *Temperature*: Record the air temperature and the water temperature at the site.
- *pH*: Measure the pH at the site. Exposure to air will quickly change pH of subsurface samples.
- *DO*: Fix samples for the Dissolved Oxygen Test. Each group of students will need 20 mL of fixed sample, and each sampling bottle contains 60 mL, so you will need one bottle of fixed sample for every three groups. (You should complete the DO titration within eight hours of fixing the sample.)

If the entire class cannot visit the sampling site, either you or a small group of students could complete these procedures in the field, and the class could complete the rest of the testing in the lab later that day.

6. Obtaining Permission from a Landowner

Check to see if your site is on private property. If it is, explain to the property owners what you would like to do and ask for their permission. Stress the educational purpose of the program, and emphasize that the program has nothing to do with regulation or litigation. Some landowners might like to participate with your class.

7. What Students Should Wear

Students should expect to get wet and dirty in the field, and they should not hold back from participating out of concern for their clothing. Be sure they wear clothes that are appropriate for the weather conditions, and emphasize warmth. Even if it seems warm at school, students should bring jackets, and in cooler weather they should have hats and gloves. If possible, at least one member of each group should have rubber boots so he or she can collect samples without getting his or her feet wet. Ideally, everyone should wear waterproof boots or, if the weather is warm, old sneakers.

IV

PRE-SITE VISIT PREPARATION

1. Site Survey

Once you have chosen your site, have your class learn as much about it as they can. Examine maps of the site's watershed area, such as road maps, USGS maps that show the topography, and town maps.

The conditions in the watershed area will affect the quality of water at your site. Understanding these factors will lend significance to the tests your students will perform. Use the maps to discuss the following:

- Wetlands and Marshes: Wetlands and marshes help to purify water. They can use up excess nitrogen. An abundance of healthy plants can recharge the oxygen level. These areas also act as sponges to retain water during dry spells and absorb the flow of streams during wet times, thereby limiting the effect of floods. (Erosion during floods increases the amount of sediment and accompanying pollutants entering streams.)
- Land and Water Uses: Your maps will give you many clues about how land and water are used; supplement these clues with your class's personal knowledge of the area. Areas of development (residential, urban, industrial) usually cause increased

pollutants, higher temperature and changes in such factors as pH and dissolved oxygen. Recreational uses of water, such as swimming, fishing and boating, usually mean that the water in that area is relatively clean. Likewise, if your site is in a protected wilderness area, the water will probably be relatively free of human-made pollutants from the immediate area. (It can, however, be affected by conditions upstream.) If your site is part of a public water supply, such as a reservoir or a stream that feeds a reservoir, its conditions will be closely monitored and conditions that would adversely affect its suitability for human use would be prohibited or corrected. What general predictions can your class make about the water at your site based on the land and water uses?

- Sewage Discharges and Storm Drains: Sanitary and storm water discharges affect many factors in water. Pollution can increase the amount of algae and other plant life in the water, and it can decrease the level of dissolved oxygen. These changes can affect the type of fish that live in the water and often indicate the presence of impurities that make the water unfit for recreation or drinking. Sewage discharge points and storm drains generally contain harmful bacteria; the presence of coliform bacteria in the water indicates the presence of pathogenic bacteria. These discharges also often increase the turbidity level of the water and the water temperature. These factors, in turn, affect other water quality factors, such as dissolved oxygen and pH.

Cooling water discharge from industrial plants may contain no new pollutants, but it can raise the water temperature, which in turn impacts other factors. Water samples from upstream and downstream of these discharges can differ dramatically. If you choose a site near a discharge point, you might try to collect samples from at least two locations to compare them.

- Highways: Highways can affect water quality even in undeveloped and protected areas. Runoff from highway areas can contain salt and oil, and can carry increased levels of sand and dirt.
- Soil, Rocks and Vegetation: The type of rocks and soil in the surrounding area affect some water quality factors, particularly the pH and turbidity levels. Soil that contains a lot of decaying vegetation has lower pH levels than soil without much organic material. Decaying organic material produces carbon dioxide which in turn raises the acidity of the water (lowers the pH) and might raise the BOD (biochemical oxygen demand). Certain types of vegetation, such as oak and pine trees, thrive in acidic soil. Groundwater that contains runoff from areas with oak or pine forests or with soil rich in decaying organic material will likely have a relatively low pH level.

Other geological factors may mitigate these conditions. Soft rocks, such as lime-

stone, act as pH buffers and raise the pH level of water. Hard rocks, such as granite, have no buffering capacity, so the water is more susceptible to acid precipitation and runoff. If groundwater seeps through rock formations in the watershed, the type of rock will help determine the pH level.

The condition of the banks along streams, ponds and lakes also affects water quality. Loose, bare soil can lead to erosion. Soil erosion can increase the turbidity of the water, which in turn affects, among other things, photosynthesis. Rocky banks, banks covered with dense plant growth, or surrounding wetlands can reduce soil erosion.

The amount of vegetation at the site can affect water temperature, which in turn affects the potential level of dissolved oxygen, the rate of fish metabolism, and the fish species that live in the water. (Some fish, such as trout and bass, for example, require cool water.) Dense, overhanging trees keep the water cooler, while the sun warms up unprotected water surfaces. Heavily shaded water may appear clearer than water in the sun, because the lower levels of photosynthesis reduces plant growth and decreases the amount of algae.

- Velocity and Depth: The speed at which streams and rivers move influences such factors as water temperature, turbidity and dissolved oxygen. Fast moving streams do not warm up from the sun as much as slower moving water or standing water in wetlands, ponds and lakes. They also may pick up more sediment if the banks are prone to soil erosion.

Deep bodies of water are generally cooler than shallow ones. In addition, deep bodies of water tend to stratify, so a sample taken in a shallow cove might differ greatly from a sample taken from the bottom or from the surface far from shore. (Because of safety considerations, you may not be able to get samples from the bottom or the middle of most deep bodies of water. The samples you take from the shore may not represent the general conditions of a lake, river, or body of sea water.)

- Fish and Wildlife: The abundance and type of fish and wildlife in a body of water can indicate a lot about the water conditions. Some fish can only live in certain temperatures and at certain levels of pH and dissolved oxygen. If possible, find out from local residents, fishermen or town officials what type of fish live in the water at your site. You can use this information as an indicator or predictor of certain water quality factors.

Send a Scout

If you or any of your students can visit the site before the site visit, your class can gain additional information for your site survey. How does the water appear? Look for signs of pollution, litter, and erosion. Notice the condition of the banks and the vegetation both in and around the water. How clear is the water? How deep? How fast does it move? How high are the waves? Do you see any frogs, insects, or other forms of life? Are there buildings around the site? How close are roads and other development? Use this information to make predictions about the quality of the water.

Complete the Site Survey

Have the students fill out the *Site Survey Form* before completing the tests. If you cannot complete the form, the exercise will still provide a good basis for discussion. After your site visit, you can return to these issues. What can you deduce from the results of the tests your class conducted? For instance, if you found that a pond had a neutral pH level despite surrounding pine forests, you might deduce that limestone rock formations were buffering the acidity of the soil. On the other hand, you might discover that the town's water department limes the pond to reduce the acidity because it is part of the water supply, or that the state's Fish and Wildlife Agency limes it in order to restore fish populations.

2. Water Quality Predictions

NOTE: You may want to make these predictions and hold this discussion after you have described and discussed the tests.

Based on the information you have learned about your site, what water quality conditions might your class expect to find? What effects would these conditions have on humans? Animals? Fish? Suppose, for instance, your site has many single-family homes surrounding it. The lawn fertilizers or septic tanks of these houses might increase the nitrogen level of the soil. Because of the elevated level of nutrients, you might predict increased algae growth, decreased DO, and increased BOD. If the map showed wetlands between the houses and the water, however, you might expect that the nitrogen level would not be unusually high because the wetlands would absorb and process the nitrates. If your scout reported large overhanging trees at the site, you might predict that the water temperature would be cool and that, as a result, the dissolved oxygen level might be high. However, the dissolved oxygen level might be lower than you expect because of the presence of pollutants you could not predict, or because of more aquatic vegetation than you expected.

In making predictions, emphasize the importance of understanding the interrelation-

ship of factors, such as temperature effects on pH, dissolved oxygen, and salinity. The class should also take into account the season in which you conduct the field test. Encourage your students to make predictions based on what they know, while emphasizing the importance of verifying these predictions based on field experiments.

Do not be concerned about whether or not your class predictions prove accurate; be concerned about the process by which they arrived at their predictions.

Use the *Prediction Form* for students to record their expectations. Have them complete it either individually, in groups, or as a class. Do not worry if you do not have enough information to make predictions about every factor.

You can compare your predictions to the results of your experiments later. If your results do not closely match your predictions, the class should not conclude that they predicted “wrong”. Many factors could lead to unpredicted results. When the predictions differ from the actual results, try to determine why. What information did you not have that might have helped you predict more accurately?

3. Practice with Test Equipment and Procedures in the Classroom

The success of your field testing will depend upon the ability of your students to perform the tests properly. That ability will depend on their familiarity with the equipment. Before the site visit, you should devote at least one class period to practicing the tests and learning to use the equipment (see notes below).

Depending on the age and experience of your students, your class may need to practice simple measuring techniques with plain water before performing the tests. For example, some students have difficulty pouring water into a test tube to a certain metered line, or squeezing just one drop of water from a dropper.

In practicing these skills, students should also practice working in groups. One student could hold a test tube, while another adds drops and a third reads the instructions and records data. They can then switch roles so that everyone has a turn at every task. Make sure that each student in each group can accomplish each task the group will be responsible for in the field and back in the classroom. You may want to set up stations for the different tasks so that groups can rotate.

List of Specific Skills to Practice

- Collecting samples and capping the bottles

Collecting water samples lies at the heart of all the field tests. Fill a large tub or bucket of water. Students should lower a collection bottle into the bucket gently. In the field, they must be cautious not to stir up the water and disturb any bottom sediments. These sediments would make readings for turbidity and total dissolved solids unreliable.

The dissolved oxygen test requires that no bubbles be trapped in the water and that the water fill the bottle completely. Students should gently lower the bottle into the water sideways without creating bubbles. When the bottle is immersed they should turn it so the mouth faces upwards (still under water) and gently tap the bottle so that any small bubbles trapped inside the bottle rise to the surface.

- Pouring measured quantities of water

Many tests require pouring precise amounts of water from a sample bottle into a measured container. Students should practice pouring water from the sample bottle to specific metered lines, such as 5 mL.

- Using pipettes and titration tubes

Pipettes (droppers) and titration tubes allow students to add small, measured quantities of chemicals or reagents to the water sample. Students should practice using plain water. Have them add a specific number of drops (such as one, five and ten) to a sample using the pipette. They should be comfortable getting one drop at a time into the sample bottle. Also, have students practice using the titrator in the DO test kit.


- Comparing colors on a colorimeter

Using the reagents for the pH test, prepare several test tubes with different pH levels. (You can make different levels by adding a drop of carbonated beverage, lemon juice, or bleach, or a pinch of baking soda.) Ask the students in each group to compare the colors of the tubes to the colorimeter to determine the pH level. They should hold the test tube and the colorimeter up to the light. They might double check their pH measurement using a strip of litmus paper, or by comparing notes with other groups.

- Using a Thermometer

Temperature readings must be recorded immediately at the field site. Students should practice holding the thermometer in the bucket and quickly reading the temperature. (Some students need practice figuring out what the temperature reading is when the alcohol stops between numbered lines.)

- Reading water level in a test tube or graduated cylinder
Because of surface tension, water in a test tube or graduated cylinder takes on a concave shape, called the *meniscus*. Students should read the water level by looking at the tube at eye level and reading from the bottom of the meniscus.

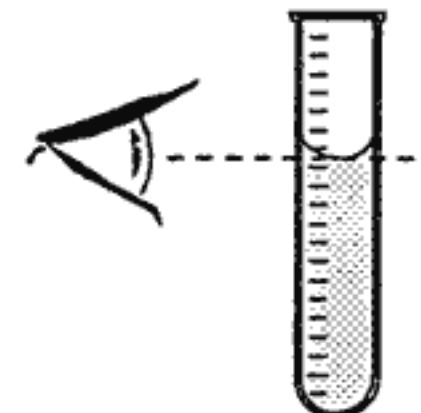

4. Working in Groups

For the site visit, you may want to divide your class into groups. Each group will collect a water sample and conduct one or more tests. Working in groups will help these tests go smoothly and help guard against error.

However, group work does not always come naturally. Have your students begin to work in their groups during your pre-site visit preparation. While practicing the methods and learning to use the equipment, each student can have a turn at the different roles in the group. To promote group cohesion and collective support, you may want to consider evaluating the group's work rather than the work of the individuals within the group.

Before heading out to the field, make sure that each group knows what tests it will perform and what role each student will play. Every student should have an assignment so no one wanders around disturbing other groups.

Within each group,

PERSON 1 should read the instructions aloud and record the results.

PERSON 2 should add and mix the reagents.

PERSON 3 (optional) should open and close reagents, check the testing procedure and verify the results.

Groups should work cooperatively, sharing test equipment and comparing results. In selecting students for groups and assigning tests, keep the following points in mind:

- The DO and BOD tests require acidic reagents and should be done only by your most responsible students. In addition, the waste must be neutralized before disposal. For lower grades, teachers may want to complete this test as a demonstration.
- The nitrates test results in a hazardous waste that must be properly disposed of in the collection jar in the kit.
- The pH paper is simple and flexible. It is perfect for those students who may not attend well to more precise, lab-oriented activities. If possible, you may want to let those students test a variety of liquids in addition to the water sample.

- A single run of any test may result in incorrect results. To ensure accuracy, try to run each test at least two or three times with different groups.

5. Additional Materials Recommended for the Field

In addition to the equipment contained in the kit, you will need some or all of the following materials:

- *A jug of fresh water:* Fresh water is necessary for rinsing hands and equipment, and for making demineralized water for salinity testing.
- *Bottles for holding your sample water:* Two-liter soda bottles work well, but they are hard to submerge in shallow water without stirring up the bottom.
- *Plastic containers, such as deli containers:* These are ideal for scooping water from shallow sites. Students may then pour the water into appropriate sampling bottles, such as two-liter soda bottles or the DO test bottles.
- *Rope with depth markings:* If you are testing deep water from a safe location, mark a rope into meters so you know the depth at which you are measuring temperature or drawing water. Electrical tape works well to make depth markings on a piece of rope.
- *Plenty of extra rope:* You may need it for lowering a sample bottle or for offering security on a slippery slope.
- *Watch:* Certain tests, such as the test for nitrates, require timing.
- *Marking pens:* Permanent markers that will not wash off are needed for labeling.
- *Cups or beakers:* These are for holding small samples and are especially important for the TDS and Salinity test.
- *Aluminum foil:* This is needed to wrap the sampling bottle for the BOD test. BOD samples must remain in the dark for five days.
- *Milk crates:* These are perfect if you are sampling from a beach. You can walk out into about a foot of water without getting wet.
- *Warm shoes and clothes!!!*

6. Setting Up for Field Work

To keep your class organized and efficient, you may want to either assign specific students to conduct each test or set up work stations and have groups of students move among them.

V

POST SITE VISIT FOLLOW-UP

After your class has returned from the field site and completed all the tests (it will take another two days before you have the results of the coliform test and five days before you can complete the BOD test), we recommend that you devote at least another class period to discussing the results. We also suggest that your students submit group reports or journals about the tests they performed and that the class as a whole record the compiled results. You may also review the predictions that your class made prior to the site visit.

Recording Results

Each group should record the results of their test/s on the *Data Recording Form*. We suggest the groups also keep a lab journal, in which they can discuss their expectations and any difficulties they had in the field or doing the test. You may also want to make a class journal, lab report booklet, or poster to record the results of all the tests.

The records should indicate the date, time of day, weather conditions, level of recent rainfall, tide, and any other relevant information. This information is essential for two reasons. First, it directly affects the results of your tests. (If the weather has been warmer, dryer, sunnier during one test session than during another, you may have very different results.) Second, if you choose to repeat this activity year after year in order to “monitor” the same site, you will need to compare weather conditions as well as the test results. From

one year to the next, the conditions that indicate water quality may differ. That difference may or may not indicate that the water quality is improving or deteriorating. Variations in the weather may have led to the variations in results.

Reporting Results

Each group should report about the tests they conducted to the rest of the class. These reports should include the results they had expected, the results they actually got, and the significance of these results. For instance, a group's report on pH should mention the effect of the pH level on fish life, and should hypothesize about the conditions in the watershed that might have led to the pH levels they found. It should also discuss the interaction of pH with other conditions tested at the field site.

We recommend oral reports so the whole class will hear a review of each of the tests in the context of the entire program. Group members can report on different aspects of their topics.

Comparing Results With Predictions

Did the results match the predictions? Discuss what could have led to the results you obtained.

- You may not have been able to take a "representative" sample because of safety or access restraints; a representative sample might have yielded the results you predicted.
- The weather conditions at the time of the site visit may have temporarily changed conditions. Such factors as higher than normal air temperatures, unusually high or low rainfall, or extended periods of cloud cover may affect test results.
- The conditions at your site may vary from conditions throughout the watershed, or may be affected by factors you could not have anticipated.

Sharing the Results of Other Classes and Other Sites

Complete the *Data Recording Form* at the conclusion of your testing. Submit this form to the MWRA. We will compile these forms regularly and send them to teachers who have attended our workshops. They should provide a valuable long-term guide to problems and solutions teachers encounter.

VI

THE TESTS

TEST 1: Temperature

Brief Summary

Water and air temperatures are measured with a shielded Celsius thermometer.

Note: To obtain the most accurate results, this test should be completed in the field.

Background

Most aquatic organisms have evolved to take advantage of one of water's most unique features: its heat capacity, or its unusual ability to absorb thermal energy (heat) with only minimal changes in temperature. Most fish, amphibians and sea mammals require fairly constant water temperature, and can only survive within certain temperature ranges. They can handle seasonal fluctuations because water temperatures change much more slowly than air temperatures. If water temperatures change more than 1° to 2°C (2° to 4°F) within 24 hours, aquatic animals can suffer thermal shock, which can injure or kill them, and it can also make fish more susceptible to disease and parasites. In addition, the stages of these creatures' life cycles are highly sensitive to seasonal changes in water temperature. Changing temperatures signal many animals to mate, lay eggs or migrate.

Unfortunately, many of the side effects of our industrial society affect water temperature, usually raising it. These increases in water temperature often have a negative effect on water quality.

TEST 1: Temperature

Natural Factors That Influence Water Temperature

- The size (volume) of the body of water: large bodies change temperature more slowly, so a small stream or pond will vary in temperature more than a large lake or ocean.
- The depth of the water: deep waters are cooler because they warm up more slowly; the deeper the water, the less sunlight warms it and the cooler it stays.
- The color and turbidity of the water: dark waters convert more sunlight to heat.
- The temperature of tributary water: rivers or lakes receiving water from snow-fed mountain streams will stay cooler than those fed by streams meandering through flatlands.
- The amount of overhanging vegetation: during the summer, shaded water will stay cooler than water exposed to sunlight.
- The direction of a stream: streams that run south are exposed to more sun than those running east/west.
- The latitude, season, and time of day.

Human Factors That Influence Water Temperature

- Industrial facilities and power plants discharge water used for cooling.
- Storm runoff contains water warmed by urban surfaces, such as streets, sidewalks, and parking lots.
- Cutting trees along banks exposes water to more sunlight.
- Soil erosion increases the amount of suspended solids, making water turbid, and turbid water absorbs more heat from the sun.

Effects of Raising Water Temperature

- Warmer water holds less oxygen, yet produces conditions that require more oxygen.
- The rate of photosynthesis by algae and larger aquatic plants increases. The result of this increase is a higher level of BOD because of the increased amount of decaying organic material.
- The metabolic rates of aquatic organisms increase. As their metabolism increases, they become more active and consume more oxygen, reducing the DO level.
- Organisms become more sensitive to toxic chemicals, parasites and diseases.
- Bacteria (including pathogenic bacteria) and parasites can sometimes grow.

Testing for Temperature

Overview:

In this test, you will first measure the air temperature. Then you will either measure the temperature of the water at the same location and depth from which the water samples are taken for the other tests, or you will examine variations in water temperature in a body of water.

You may hold the thermometer directly in the body of water itself or in a container of sample water. If you test water from a container, you should measure its temperature before the water has time to warm up or cool down.

Length of Test: 5 -10 minutes (including waiting time)


Difficulty of Test: Simple

Protective Clothing: Rubber gloves

Suggestion: Always predict the water temperature before taking it. You may be surprised fairly often.

PROCEDURE

1. Measure the air temperature by holding the thermometer in the shade for about two minutes. Do not let the thermometer rest on surfaces that might transmit their own heat.



2. Record the air temperature on the *Data Recording Form*.
3. Measure the water temperature by submerging the thermometer into the body of water (or a container of sample water) and holding it there for two minutes. The thermometer should be at least four inches beneath the surface and should not touch the bottom. If possible, try to hold it at the same depth from which you drew the samples for the other tests.

Note: If you are working from a bridge, you should measure the temperature of sample water from a container. Regardless of how fast you pull up the thermometer, air temperature and evaporative cooling will distort your measurement.

4. Record the water temperature on the *Data Recording Form*.
5. Wash off the thermometer with tap water and wipe it dry before returning it to the kit.

Interpreting Results

What factors at the site might contribute to the water's temperature:

- size, depth, and flow of the water?
- turbidity and color?
- shade and vegetation?
- direction of stream?
- season, time of day and recent weather?

TEST 1: Temperature


Did you find any indications of thermal pollution (activities that raise the water temperature above its natural level) such as industrial discharges, storm drain discharges, or discharges from electrical generating plants? These influences can raise water temperature in the ocean as well as in freshwater bodies.

Water temperature affects several other water quality factors:

- *Dissolved oxygen* levels are higher in colder water.
- Higher temperatures speed up chemical reactions in plants and animals. Fish increase their metabolic rate in warm water and need more oxygen.
- Some fish can only live in certain temperature ranges, for example:
 - Native brook trout live where water remains below 13°C (55°F) in the summer;
 - Rainbow trout and salmon need water temperatures of 13° - 20°C (55° - 68°F) in the summer;
 - Carp and catfish prefer water above 20°C (68°F) in the summer;
- Plant life changes with water temperature:
 - Green algae bloom above 25°C (77°F) and blue-green algae bloom at 30°C (86°F). (Algae blooms occur when water has too many nutrients, and they lead to low oxygen levels.)
 - Many fresh water aquatic plants thrive at 20°C (68°F), while fewer plants live below 13°C (55°F).

Extension Activities

1. If you locate a site where two streams converge or if you find an outflow from an industrial site or a utility plant, take the water temperature from as many locations as you can and plot or draw the thermal plume. (See illustration.) Similarly, if you locate an area where runoff from paved areas enters a stream, take the water temperature upstream and downstream of this runoff, and measure the temperature of the runoff itself.
2. Bring a jar of water from your sampling site back to the classroom. Heat and cool different samples of the water to different temperatures. Perform the pH test, DO test, and salinity test to see if temperature affects the results.

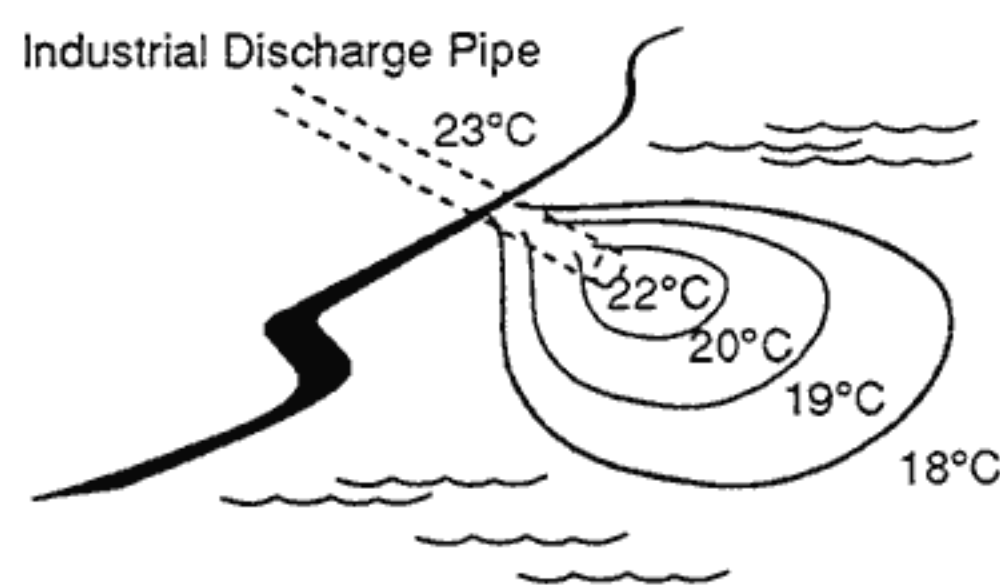

TEST 2: pH

Brief Summary

A relative measure of water's alkalinity/acidity. This test uses a liquid reagent and color comparator.

Note: *To obtain the most accurate results, this test should be completed in the field.*

Background

Chemically, pH indicates the number of hydrogen ions. At a pH value of 7.0, water contains an equal number of hydrogen ions (H^+) and hydroxyl ions (OH^-). If there are more hydrogen ions than hydroxyl ions, the substance is acidic and has a pH level lower than 7.0. If there are more hydroxyl ions, the substance is alkaline, and it has a pH value higher than 7.0.

The pH scale is logarithmic, so each one-digit change in the scale indicates a ten-fold change in acidity or alkalinity. In other words, a substance with a pH of 3 is 10X more acidic than a substance with a pH of 4; 100X more acidic than a substance with a pH of 5, and 10,000 times more acidic than a substance that is neutral. Substances at the far ends of the pH scale, therefore, are extremely acidic or alkaline.

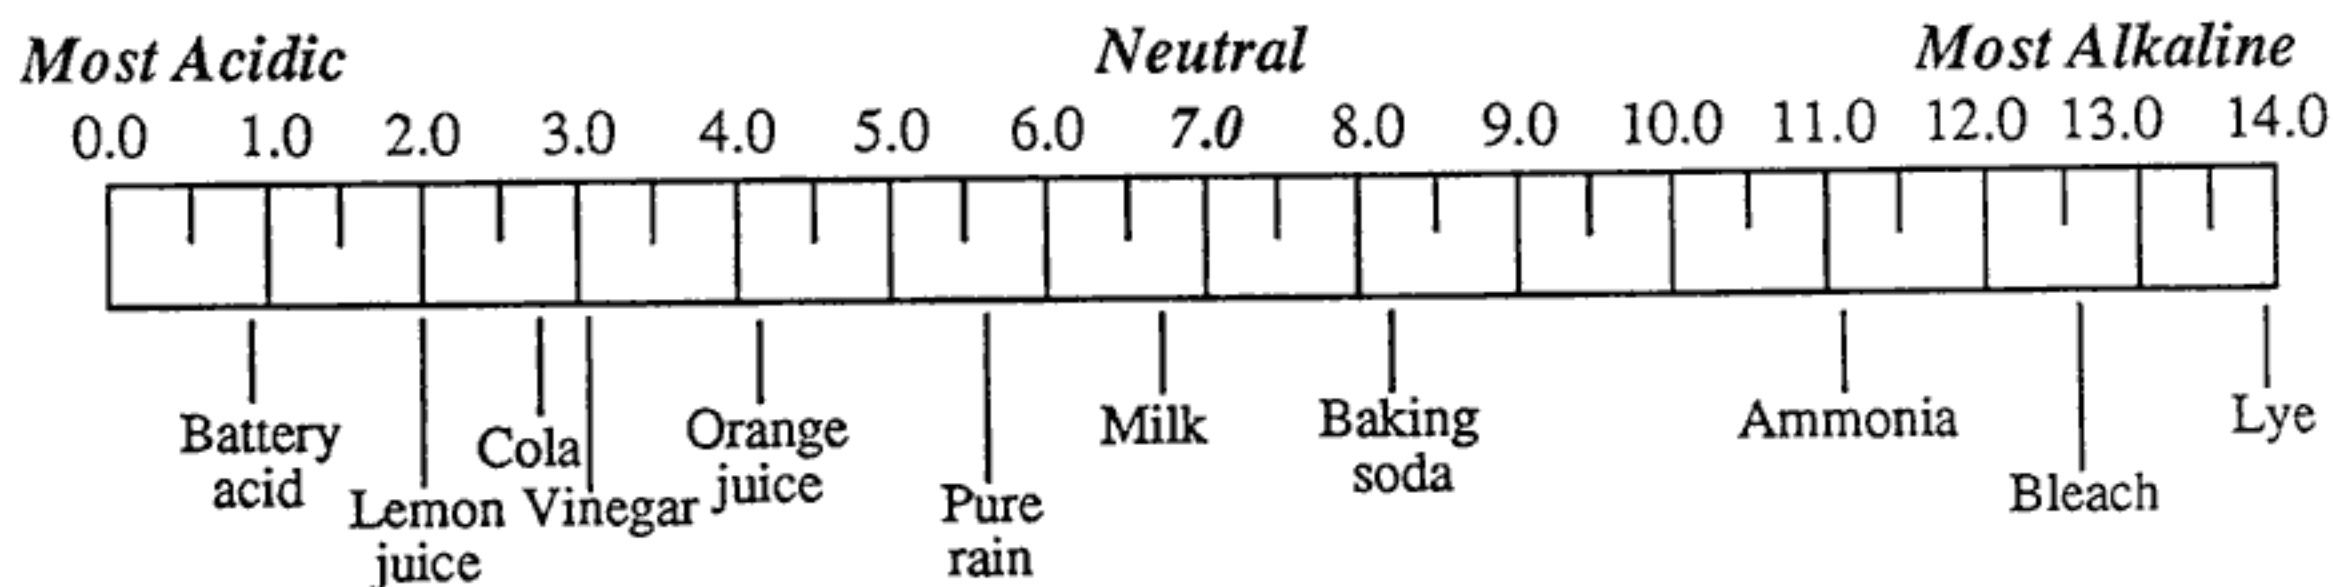


Table 1: *pH values of common substances*

Natural Factors That Influence pH

In nature, decomposition of organic materials releases carbon dioxide, and as that carbon dioxide mixes with water, it forms carbonic acid. Alkaline minerals, such as limestone, however, can buffer that acidity. At the time of their formation, most lakes and ponds had high pH, but over time carbonic acid has lowered their pH. Fresh water is much more susceptible to changes in pH than sea water because the minerals in sea water act as almost infinite buffering agents. Sea water, in fact, tends to maintain a steady pH of between 7.7 (in deeper waters) and 8.1 (at the surface).

TEST 2: pH

Human Factors That Influence pH


The industrial revolution brought a variety of new combustion technologies which released varying amounts of sulfur dioxide (SO_2), oxides of nitrogen (NO_x), and carbon dioxide (CO_2) into the atmosphere. These compounds go through a series of chemical reactions in the atmosphere and eventually return to earth as acid precipitation. Where limestone exists in the soil, the acid is readily neutralized; where it does not exist, such as in large portions of the northeastern U.S., many lakes and streams have acidified. Interestingly, many of the acidic lakes are beautifully clear, but that clarity is caused by an alarming lack of life.

Testing for pH

- Overview:* This test consists of a test tube of sample water to which you will add 10 drops of a wide-range indicator. You will then compare the color of the solution with colors in an octet comparator. The test contains two comparators: one ranges from 3.0 to 6.5; the other, from 7.0 - 10.5.
- Length of Test:* <5 minutes
- Difficulty of Test:* Simple
- Protective clothing:* Eye protection, rubber gloves
- Suggestion:* Reading the colors on the octet comparator is rather subjective. Given the ease and speed of this test, therefore, we recommend that each person in the group read the comparator, and that several different groups carry out the test. If the results vary, take a class average and discuss the inherent difficulties of testing variability.
- Expected Results:*
- Sea water maintains a pH of around 8.0. In shallow coastal waters, that number may go as low as about 7.0.
 - Fresh water in the region generally ranges from about 5.5 to 6.5. Snow and rainwater may be lower.


PROCEDURE

1. Fill one test tube with sample water to the level of the line marked on it (5 mL).
2. Carefully add 10 drops of the wide-range indicator to the test tube.
3. Cap the test tube with the small blue plastic cap and shake the solution gently until the color is uniform. (DO NOT cover the tube with your fingers. It is bad lab practice and it might change the pH of the solution.)
4. Select the appropriate octet comparator and insert the test tube into the appropriate slot.



USING THE OCTET COMPARATOR

- The test contains two comparators: one ranges from 3.0 to 6.5; the other, from 7.0 - 10.5.
- After adding indicator solution, the water sample will change colors. The color indicates the level of acidity/alkalinity.
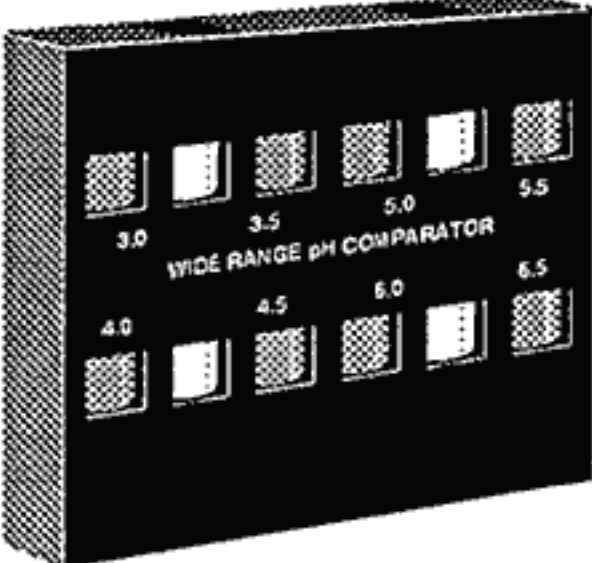
<u>Comparator #1</u>		<u>Comparator #2</u>
Pinks = 3.0 - 3.5		Greens = 7.0 - 8.5
Oranges = 4.0 - 5.0		Blue-Greens = 9.0 - 9.5
Yellows = 5.5 - 6.5		Blues = 10.0 - 10.5

5. Hold the comparator so you are looking into a light source (preferably natural light) before comparing the color of the sample to the colors in the comparator.
6. Record the pH value on the *Data Recording Form*.
7. Have a lab partner (or a second person) take an independent reading so you can double-check each other.
8. The waste from this test is harmless to the environment and the water system, so you may pour it out in the field or wash it down the drain.
9. Clean and dry the equipment and carefully replace everything into the kit.

Interpreting Results

Did you predict the results you found? What conditions at the site or in the watershed area might have led to this pH level? What type of fish and plant life can and cannot survive at this level? Refer to Table 2 on page 38 for additional details.

Extension Activities

1. Test liquids throughout the school using the pH paper in the kit.
 - Procedure for using pH paper*
 - a. Wet the pH paper in the sample.
 - b. Compare the pH paper with the color chart in the box of pH paper.

Test whatever sample liquids you want. Before testing a liquid, predict what you think the pH might be. Here are a few suggestions with some comments about their chemistry:

- Colas: All carbonated beverages contain carbonic acid, so they are acidic.
- Aspirin (dissolved in water): Aspirin is acetylsalicylic acid.

TEST 2: pH

TABLE 2: The Effects of pH on Freshwater Aquatic Life*

More harmful		Less harmful			Beneficial		Less harmful		More harmful		
Few, if any, fish can survive for more than a few hours. Some plants and invertebrates can live at this level.	Lethal to salmonids (salmon and trout).	Few fish, frogs or insects can survive.	Most fish eggs will not hatch.	Bottom-dwelling bacteria—those that decompose organic material—begin to die. Leaf litter and detritus accumulate, locking up nutrients. Plankton disappears, and there are few snails and clams. Mats of fungi replace bacteria. Metals such as aluminum and lead are released in forms toxic to aquatic life.	Most fish and plant life survive.	Optimal for most organisms.	Not directly harmful to most fish, but some chemicals, such as ammonia, become more toxic at higher pH levels.	Harmful to salmonids and perch.	Lethal to salmonids; harmful to carp and perch.	Rapidly lethal to all species of fish.	
3.0	3.5	4.0	4.5	5.0	5.5	6.5	8.2	9.0	10.5	11.0	11.5
ACIDIC					NEUTRAL			ALKALINE			

*Because sea water is pH-steady, this chart does not include marine life.

Adapted from *The Monitor's Handbook* from the LaMotte Company.

Bicarbonate of soda (dissolved in water): People often take bicarbonate of soda to neutralize the unpleasant effects of too much stomach acid. What do you think its pH value is?

Alka-Seltzer or Buffered Aspirin (dissolved in water): Both of the these substances contain acetylsalicylic acid and bicarbonate of soda, an acid and an alkali.

- Think of ways to alter the pH of a sample. For example, you could make solutions of dilute lemon juice and bicarbonate of soda, and gradually add drops of those solutions to samples to see if they can change the pH.
- Measure the pH of water in nature, such as rainwater, snow, and parking lot runoff. Let rainwater seep through a sample of soil in your area and compare the pH level both before and after.
- Chart the pH level of precipitation during a single storm or over several storm events. Note whether the pH level changes during the storm and the direction from which the storm came. Does rain from a "nor'easter" (which comes from the northeast where there are few sources of industrial pollution) have a different pH level than rain from the south or west (where industrial regions emit sulfur dioxide and oxides of nitrogen)?

TEST 3: Dissolved Oxygen (DO)

Brief Summary

A measure of the amount of oxygen dissolved in water. The test uses a two step process: in the first step, the sample is “fixed”; in the second, it is titrated to determine the level of DO in parts per million (ppm). The samples must be neutralized with an alkaline solution before disposal.

Note: To obtain the most accurate results, the sample should be fixed in the field. The second half of the test may be completed in the classroom for as long as eight hours after the sample is fixed.

Background

Water is capable of holding a reasonably large amount of dissolved oxygen, and that oxygen is essential for life. Oxygen enters the water in two primary ways: movement, such as waves, mixes atmospheric oxygen with water, and plants release oxygen to the water through photosynthesis.

As long as water is capable of holding oxygen, oxygen dissolves into it very quickly. Upon nearing the saturation point, though, the speed slows dramatically.

Several factors affect the amount of oxygen in water:

Salinity: Less salinity → higher DO

Agitation and Turbulence: More contact with atmospheric oxygen → higher DO

Temperature: Lower temperature → higher DO

(This temperature variant is compounded by the fact that organisms increase their activity in warmer water, increasing the demand for oxygen. Thus, water is more apt to become oxygen starved in summertime when water’s capacity to hold oxygen is at its lowest and organisms’ demand for oxygen is at its highest.)

Minerals: Higher mineral content → lower DO.

Plant Life: More photosynthesis → higher DO.

(During the daylight hours when photosynthesis occurs, DO levels can be quite a bit higher than at other times. DO is generally at its lowest just before dawn, and it peaks in the late afternoon.)

Organic Wastes: More waste → lower DO.

(The aerobic bacteria that decompose organic wastes (such as leaves and feces) consume oxygen.)

TEST 3: Dissolved Oxygen

These factors often affect each other. During extended warm sunny periods, for example, algae can grow profusely. If the sunny period is then followed by several days of thick clouds, the algae does not receive adequate sunlight, and much of it dies. The bacteria that decompose algae consume oxygen, causing the levels of available oxygen to decrease. If the levels of DO become too low, fish die. This scenario is particularly common in shallow water during summertime.

Acceptable Levels of Dissolved Oxygen

Fish need a minimum level of DO to survive. In general, most aquatic animals can withstand DO levels as low as 2.0 ppm only for very short periods. Few fish can survive for extended periods at DO levels below 3.0 ppm, and at DO levels below 5.0 ppm, fish grow and develop more slowly. The DO level in most areas of Boston Harbor is adequate to support a healthy fish population.

<u>DO level</u>	
2.0	Fish can live for short periods.
<3.0	Few fish survive for extended periods.
<5.0	Fish grow and develop slowly.
6.0	Healthful for most fish.

Whether or not a given body of water has a minimum level of DO depends on the temperature, salinity and level of pollution of the water. A higher percentage of oxygen can dissolve in water with low temperature and low salinity.

Simply measuring the level of DO in a body of water indicates whether or not it can support a healthy fish population at a given moment. The "quality" of that body of water may more accurately be determined by comparing the level of DO to the saturation limits of the water. The following chart shows 100% saturation at various temperatures and various levels of salinity.

Temperature °C :	Salinity (ppt)				
	<u>0</u>	<u>9</u>	<u>18</u>	<u>27</u>	<u>35</u>
0° :	14.6 ppm	13.7 ppm	12.9 ppm	12.1 ppm	11.4 ppm
5° :	12.8 ppm	12.0 ppm	11.3 ppm	10.7 ppm	10.1 ppm
10° :	11.3 ppm	10.7 ppm	10.1 ppm	9.5 ppm	9.0 ppm
15° :	10.1 ppm	9.5 ppm	9.0 ppm	8.5 ppm	8.1 ppm
20° :	9.1 ppm	8.6 ppm	8.2 ppm	7.7 ppm	7.3 ppm
25° :	8.2 ppm	7.8 ppm	7.4 ppm	7.1 ppm	6.7 ppm
30° :	7.5 ppm	7.2 ppm	6.8 ppm	6.5 ppm	6.2 ppm
35° :	6.9 ppm	6.6 ppm	6.3 ppm	6.0 ppm	5.7 ppm

Table 3: 100% Saturation Levels of Dissolved Oxygen

Example: If the salinity of a brackish water source is 18 ppt and the temperature is 5°, you would expect a DO level approaching 11.3 ppm. If the measured DO level was 4 ppm, it would have a saturation level of 35% ($4 \div 11.3$). Fish may be able to survive, but something is probably amiss with the health of the water.

Low oxygen levels are often caused by decaying organic material, such as untreated or poorly treated sewage. The bacteria that cause decay consume a great deal of oxygen as they break down the organic material. (See the BOD test.) Dense populations of very active fish can also cause a condition of low oxygen, as can sunless periods in bodies of water with dense growths of algae because the algae will consume oxygen when there is no photosynthesis taking place.

Table 3 shows how much oxygen can dissolve in water under certain temperature and salinity conditions. The numbers shown represent 100% saturation, and DO levels in nature are generally somewhat below those levels. The DO level, however, can also be substantially higher than the level shown if there is unusual opportunity for oxygen to mix with the water. Three common conditions lead to supersaturation. When cold, well-aerated water is rapidly warmed, the water could change temperature faster than the oxygen can leave it. In extremely choppy conditions (“white water”), turbulence mixes large quantities of oxygen with water. Finally, bright sunlight coupled with dense plant growth causes rapid photosynthesis which increases plant respiration.

Testing for Dissolved Oxygen

Overview:

The dissolved oxygen test uses a titration known as the “Winkler Method.” It is reliable and accurate, but it requires care and accuracy. In the “fixing” stage of the test, the oxygen present in the sample converts some of the test chemicals to free iodine. That iodine exists in direct proportion to the amount of oxygen in the water. Because of the iodine, the fixed sample appears as a yellow to yellow-brown liquid. Once the sample has been fixed, it is titrated with a specific concentration of sodium thiosulfate. The sodium thiosulfate causes the yellow color to disappear, but the color changes can be minute and difficult to discern. Therefore, a starch indicator is added to the fixed solution prior to the titration. As long as any free iodine exists, the indicator remains deep blue-purple. As soon as the titration is complete, the blue color disappears and the solution becomes clear.


TEST 3: Dissolved Oxygen

The titrator is calibrated from 0 to 10 in units of .2 mL (so the titrator holds 2 mL of titrant). Each unit represents 1 ppm of dissolved oxygen. If the scale on the titrator reads 5.5 when the starch indicator turns clear, the water sample has a dissolved oxygen level of 5.5 ppm. If the DO level of the sample is greater than 10 ppm, you will have to refill the titrator during the test.

- Length of Test:* Fixing: 10 minutes (to be completed as quickly as possible in the field)
Titrating: 10 minutes (in the field or the classroom)
- Time Restrictions:* The fixing phase of this test must be carried out in the field. Once the solution has been fixed, the sample may be returned to the classroom for the titration. A fixed sample should be tested within eight hours.
- Difficulty of Test:* Difficult (Requires care, patience and precision, and involves the use of acids.)
- Protective Clothing:* Eye protection, rubber gloves, apron
- Safety Procedures:*
- Wash immediately if any reagent spills or drips onto the skin.
 - If an accident occurs, follow the directions on the Material Safety Data Sheet (MSDS) for that particular chemical.
- Suggestions:*
- Sample must not be “aerated” during collection. In other words, do not allow air to bubble into the sample container. If possible, gently tap the sample bottle while it is under water to let air bubbles escape.
 - The sample should be “fixed” in the field as quickly as possible. The oxygen level in the bottle can change very quickly.
 - For accuracy, test at least two samples at each site. (The kit contains extra DO sample bottles for additional tests and for BOD testing.)
 - During fixing, it is OK for a small quantity of sample to overflow. The overflow will not affect the results, and it is important that no oxygen be introduced during the testing process.
 - Follow the directions carefully. Not allowing the floc to settle and not mixing for the specified time could result in inaccurately low readings.
- Expected Results:*
- See Table 3 on page 40. The results for healthy water should be reasonably close to the limits indicated on the chart.

PROCEDURE**Fixing the Sample**

1. Fill a DO water sampling bottle to overflowing with sample water. Pour the sample water down the side of the sampling bottle so it does not slosh or mix air bubbles in with the sample, because bubbles will change the test results.

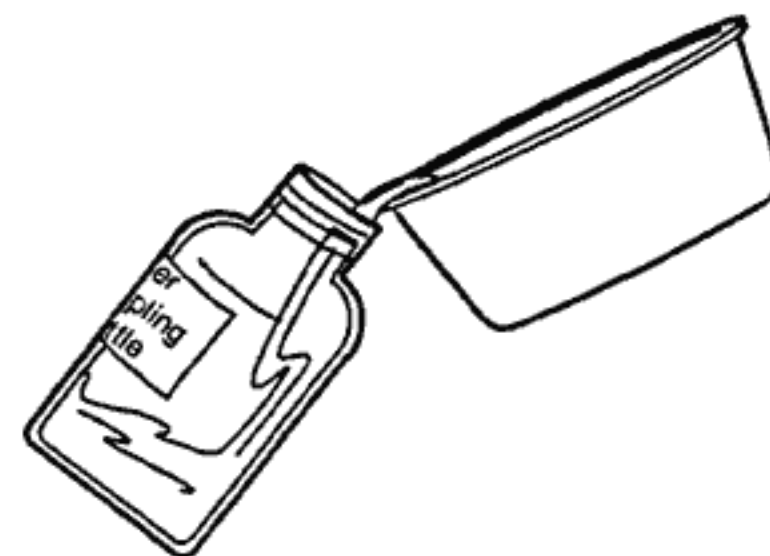

2. Cap the bottle briefly. (The cap contains a small insert that will force a tiny amount of sample out of the bottle, thus reducing overflow as chemicals are added.)

NOTE: During fixing, it is OK for a small quantity of sample to overflow. This overflow will not affect the results. It is far better to have some overflow than an air bubble, because an air bubble could cause oxygen to be introduced to the sample during the testing process, thus altering the results.


3. Remove the cap and carefully add 8 drops of the Manganous Sulfate solution and 8 drops of the Alkaline Potassium Iodide Azide. A "floc," or white precipitate, will form.
4. Cap the bottle and mix it gently for about 30 seconds. Do not shake it vigorously because shaking could introduce oxygen. Let the bottle sit for a few minutes while the floc settles to beneath the shoulder of the bottle.

NOTE: If you rush this part of the process by not mixing the solution or not allowing the floc to settle, the results will be falsely low.

5. Carefully add 8 drops of the sulfuric acid solution and replace the caps on both containers.
6. Gently mix the solution by continuously inverting the bottle until the precipitate is gone. The color of the sample should be yellow to yellow-brown. The sample may have to be mixed for ten minutes or more. A clear solution indicates either the total absence of oxygen or improper fixing, and the precipitate will not disappear completely if the sample has high turbidity. The fixed sample may be kept for up to 8 hours before completing the test.

Titration of the Fixed Sample

1. Fill the titration tube to the 20 mL line with the fixed water sample.
2. Add 8 drops of the Starch Indicator Solution.

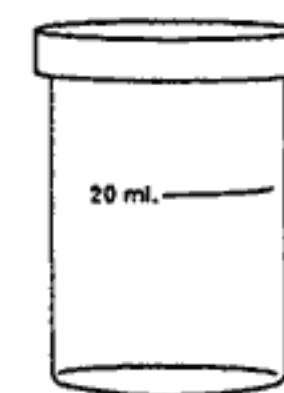

Titration tube

TEST 3: Dissolved Oxygen

3. Cap the titration tube and gently swirl the solution to mix it. The solution will be deep blue-purple.

NOTE: *The yellow color of the fixed solution is caused by iodine. The amount of iodine in the fixed solution is directly proportional to the amount of oxygen in the sample. The blue-purple color is the result of the starch indicator being in contact with the free iodine. When there is no more iodine in the water, the color will disappear.*

4. Fill the titrator to the "0" mark with Sodium Thiosulfate. Fill the titrator by putting its tip through the small hole in the top of the Sodium Thiosulfate bottle. Then turn the bottle upside down, hold the titrator at eye level (while wearing eye protection), and slowly pull out the plunger until the liquid fills the titrator to the "0" line. If any large air bubbles remain in the titrator, hold the titrator upside down and gently tap the side; the bubbles will rise to the surface. Once it is full, turn the titrator right-side-up again. **THE TITRATOR IS GLASS, SO TREAT IT GENTLY.**



Titrator

5. Insert the tip of the titrator into the hole in the top of the titration tube.
6. Add titrant to the blue solution one unit at a time. Swirl the tube gently after each addition. When the solution starts to get lighter, carefully add only one drop at a time.
7. When the solution becomes clear, stop adding titrant, and read the number on the side of the titrator. That number represents the dissolved oxygen (in parts per million) in the water sample.

NOTE: *The titrator only holds enough titrant to measure 10 ppm of DO. If your solution has greater than 10 ppm of DO, the solution will not have turned clear when the titrator is empty. Refill the titrator and continue with the titration, then add 10 to your results. For example, if, after refilling, your final reading is 3, you have a DO level of 13 ppm.*

DO NOT RETURN THE UNUSED SODIUM THIOSULFATE REAGENT TO THE STORAGE BOTTLE. Empty the titrator into the sample solution and dispose of it according to the instructions below.

8. Record the DO of the sample on the *Data Recording Form*.
9. Refer to Table 3: Saturation levels of Dissolved Oxygen on page 40. Find the temperature and level of salinity closest to the sample. (Fresh water will have a salinity level of 0 ppt.)

10. Determine the oxygen saturation of the sample by dividing the DO level of the sample by the saturation level on the chart.

$$\text{measured DO level} \div \text{saturation level} = \% \text{ of saturation}$$

11. Record the percent of saturation on the *Data Recording Form*.
12. Neutralize the fixed sample and the titrated sample by adding 5 - 10 drops of the neutralizing solution (bicarbonate of soda) included with the kit. Once the solutions are at pH 5.5 or higher, they may be flushed down the drain with plenty of water. The MWRA does not permit water to enter the sewer system that is less than pH 5.5 or greater than pH 10.

Disposal is a very important part of the testing procedure. *Be sure you check the pH of the neutralized solution before disposing of it.*

13. Clean and dry all the equipment and carefully replace everything into the kit.

Interpreting Results

Does the water have enough oxygen to support a healthy fish population?

DO Level	
2.0	Fish can live for only short periods
< 3.0	Few fish can survive for extended periods
<5.0	Fish grow and develop slowly
6.0	Healthful for most fish

Water that contains 80% to 125% of the possible oxygen content is considered ideal for healthy fish life. (See Table 3 on page 40.)

Extension Activities

1. Examine the effects of temperature and salinity on water's ability to hold oxygen.

Procedure

- a. Make four different water samples:
 - cold salt water (roughly 0° - 10°)
 - cold fresh water
 - warm salt water (roughly 25° - 35°)
 - warm fresh water

(Ocean water contains 35,000 ppm of salt, so you can create an ocean water substitute in your classroom by adding one level teaspoon of salt to 1 3/4 cups of water. You will need 20 mL of water for each test.)

TEST 3: Dissolved Oxygen

- b. Just before fixing each solution, aerate it by shaking it vigorously for one full minute.
 - c. Plot and compare the results of each of the four tests.
2. If you have access to deep water, test for DO from a surface sample and a deep water sample (ten meters or more). DO should be higher at the surface as a result of atmospheric mixing and sunlight, which results in photosynthesis. The temperature in deeper water tends to be several degrees cooler, so the saturation point will be somewhat higher, but that should not have a large effect on the results.
3. If you have an aquarium with an aerator in your classroom or school, measure the DO of the water with the aerator running, then test it again after the aerator has been turned off for a few hours.

TEST 4: Biochemical Oxygen Demand (BOD)

Brief Summary

A measure of the oxygen-consuming life in a water sample. The testing procedure for BOD is the same as for DO, except that the DO sample is fixed in the field then titrated immediately, while the BOD sample is left unfixed and stored for five days in the dark at room temperature. After five days, the sample is fixed and titrated. The results of the test are subtracted from the oxygen level found in the DO test, and the result is Biochemical Oxygen Demand.

Note: *Do not fix the sample until it has incubated for five days, then fix it just as you would for the DO test.*

Background

The bacteria that decompose organic materials (such as aquatic plants and sewage) consume oxygen. The amount of oxygen consumed over a fixed period of time in a controlled environment indicates the amount of organic matter – or biodegradable waste – in the water. That measure is called Biochemical Oxygen Demand, or BOD. High BOD indicates pollution; low BOD suggests good water quality. If BOD is high, it is because bacteria living in the water used up the oxygen as part of the process of decomposing organic material. Thus, the BOD serves as an important clue to water quality.

Interpreting BOD results:

1 - 2 ppm	Very clean water, little organic decay
3 - 5 ppm	Moderately clean water, some organic decay (probably from plant life)
6 - 9 ppm	Much organic decay (possibly from algae blooms)
10+ ppm	Very unhealthy levels of organic decay (often from untreated sewage)

Testing for BOD

Overview:

The basic testing procedure for BOD is identical to that of Dissolved Oxygen. The water sample that you will test, though, will have been incubated in the dark for five days at 20°C before being tested for DO. The difference in the results of the initial DO test and the five-day DO test represent BOD. When measuring BOD, do not fix the sample until you are ready to carry out the test.

$$\frac{\text{DO}_{\text{(at time of initial sampling)}} - \text{DO}_{\text{(after five-day incubation period)}}}{\text{BOD}}$$

TEST 4: Biochemical Oxygen Demand

- Length of Test:** Test: Fixing- 10 minutes, Titrating - 10 minutes (same as DO)
Incubation period: 5 days
- Difficulty of Test:** Difficult
- Protective Clothing:** Eye protection, rubber gloves, apron
- Safety Procedures:**
- Wash immediately if any reagent spills or drips onto the skin.
 - If an accident occurs, follow the directions on the Material Safety Data Sheet (MSDS) for that particular chemical.
- Suggestion:** All of the suggestions for the DO test apply.

PROCEDURE

1. Fill a DO water sampling bottle to overflowing with sample water.
2. Do not fix the sample immediately. Instead, store the full bottle in darkness at 20°C for five days. Wrapping the bottle in aluminum foil works fine.
3. After five days, test the sample for dissolved oxygen. (Follow the procedure for the dissolved oxygen test.)
4. Subtract the five-day results from the initial DO results to find the BOD, and record the BOD on the *Data Recording Form*.
5. Follow the instructions from the DO test for disposing of the fixed and tested samples. Be sure the samples are neutralized to a pH of between 5.5 and 10.0.



Interpreting Results

The BOD results indicate the amount of organic material in the water sample. The more organic material, the more bacteria will consume oxygen to decompose that organic material. An unusually high BOD level might indicate the presence of pollution or sewage.

BOD Level

1-2 ppm	Very clean water, little organic decay
3-5 ppm	Moderately clean water, some organic decay (probably from plant life)
6-9 ppm	Much organic decay (possibly from algae blooms)
10+ ppm	Very unhealthy levels of organic decay (often from untreated sewage)

Extension Activity

1. Rather than conducting a single BOD test after five days of incubation, incubate five bottles of sample water, and measure the level of dissolved oxygen each day for five days. Plot the results on a graph.

TEST 5: Nitrates

Brief Summary

A measure of a common nutrient. In the test, several reagents are added to the water sample. After twelve minutes of waiting time, the tester uses a color comparator to determine the level of nitrates in parts per million (ppm).

Note: The tested samples contain a cadmium residue. They must be stored in a special container and returned to the MWRA for proper disposal.

Background

Nitrogen is abundant not only in aquatic ecosystems, but also throughout nature; in fact, 79% of the air we breathe is nitrogen. Nitrogen is considered a “nutrient,” because it is essential for plant growth. The other nutrient most often found in aquatic systems is phosphorus, but problems caused by phosphorous are less common in New England waters, so this test focuses on nitrogen as a representative nutrient.

Nutrients are part of an important cycle of life. As part of the process of biosynthesis in aquatic environments, these nutrients are taken up by plankton and seaweeds which enter the food chain. When plants and animals die, their tissues are decomposed by bacteria, and the nutrients re-enter the water. Plants do not use nitrogen (N_2) in a pure state; rather they use it in the form of nitrate (NO_3) or ammonia (NH_3). Chemically, bacteria initially break tissue down into ammonia (NH_3). That ammonia is then oxidized by other bacteria into nitrites (NO_2) and nitrates (NO_3), thus completing the cycle.

In addition to this chemical cycle, nitrogen enters the water in other ways. Animal excrement is rich in ammonia. While the amount of nitrogen added to water by fish excrement is small, the amount added by larger animals living near the water, such as seagulls, ducks and geese can be quite large. Fertilizers, sewage, and poorly maintained or overused septic tanks, are the main human-made sources of nitrates.

Algae Blooms and Oxygen Levels

The most common signs of artificially high levels of nutrients are algae blooms and excessive aquatic plant growth. Algae blooms and increased plant growth would seem to benefit fish, because plants produce oxygen as a by-product of photosynthesis. In reality, though, algae blooms can be dangerous, and they can lead to unhealthy water quality for fish by depleting the water’s oxygen. Here is how that works:

High levels of nutrients result in increased plant growth, which increases photosynthesis. During photosynthesis (which occurs only in the presence of sunlight), plants produce

TEST 5: Nitrates

oxygen and carbohydrates. Plants respire, "burning" these carbohydrates for energy, consuming oxygen and producing carbon dioxide. Once the sun sets, photosynthesis and oxygen production end, but the plants still respire, consuming oxygen and producing carbon dioxide. Algae blooms can actually consume more oxygen at night than they produce during the day! Thus, the water in algae-rich ponds, stagnant streams, bays and estuaries can have dangerously low oxygen levels.

In addition, more plants living also means more plants dying. The bacteria that decompose the dying plants become more abundant, and these bacteria also use up much of the available oxygen. As a result, fish and other aquatic animals may not have enough oxygen to thrive. To make matters worse, these algae blooms often occur during the summer, when the warmer water holds less oxygen and the more active fish require more oxygen.

Eutrophication

Eutrophication means "enrichment with nutrients," and it can lead to the death of a lake or pond. In nature, the process can take thousands of years; human activities that introduce excessive nutrients greatly speed up the natural process.

At the beginning of the process, nutrients slowly build up in the water. More and more plant life grows in the lake, initially providing a good environment for fish. Oxygen-consuming, or "aerobic," bacteria break down the organic wastes from these plants and animals. Eventually the decaying organic material and respiring plants cause the oxygen levels to drop, and fish begin to die. Without oxygen, aerobic bacteria can no longer break down the waste, so the nutrients stay trapped in the waste. The lake can no longer support fish or animal life. Bacteria that do not require oxygen, "anaerobic" bacteria, begin to break down the organic waste very slowly. After hundreds of years, the lake fills with decaying organic materials and becomes a swamp.

Human-caused eutrophication can affect sea water as well as freshwater. As sewage and agricultural runoff enter the ocean, the concentrations of nutrients increase. This overfertilization can cause an increase in plankton and encourage the growth of aquatic plants, seaweed, and phenomena such as "red tide." The effects are most obvious in harbors, bays and estuaries because they tend to be relatively shallow and sheltered.

Testing for Nutrients

Water-borne plants use nutrients very quickly. As a result, if you test in an area with algae blooms, your tests may not reveal high nitrogen levels because the algae would have already used it up. The nutrients may have entered the water upstream where the algae would not grow because the water was moving too swiftly. Testing upstream from the bloom might reveal the source of the nutrients.

If several cloudy days follow a period of sunny days during which algae or plankton have grown wildly, the plants' respiration can cause a dramatic drop in the dissolved oxygen level. In addition, the reduced sunlight will cause some algae/plankton to die. Aerobic bacteria will then feed on the decaying plants, decreasing the level of dissolved oxygen even more.

Health Effects of One Specific Form of Nitrogen: Nitrites


Nitrites (NO_2) are a short-lived but dangerous product of the nitrogen cycle. High nitrite levels in the blood reduce its ability to carry oxygen. Fish can develop "brown blood disease," caused by this lack of blood oxygen. In humans, nitrites react with the hemoglobin in the blood, creating a condition called methemoglobinemia in which blood cells cannot carry oxygen. This condition is called "blue baby" disease because babies can suffocate from lack of oxygen. Children have even been poisoned by drinking formula made with water containing high nitrite levels. Many of these poisoning cases involve private wells where excess nitrogen from fertilizers or poorly functioning septic tanks has seeped into the ground water.

Testing for Nitrates

- Overview:* In this test, a water sample is mixed with a mild acid solution and special "nitrate reducing agent." The level of nitrates is then read on a color comparator.
- Length of Test:* 20 minutes (including 12 minutes of waiting time)
- Difficulty of Test:* Moderate
- Protective Clothing:* Eye protection, rubber gloves, apron
- Safety Procedures:*
- Wash immediately with soap and water if any reagent spills or drips onto the skin.
 - Dispose of the waste sample by sending it back to the MWRA in the appropriate bottle.
 - If an accident occurs, follow the directions on the Material Safety Data Sheet (MSDS) for that particular chemical.
- Suggestion:* When testing algae-laden waters, test upstream from the bloom as well as near it. This is important because water-borne plants use nutrients very quickly, and algae do not grow well in moving water. As a result, nutrient levels may not be elevated in areas with rich algae blooms. The nutrients may have entered the water upstream, and the algae did not grow until the water settled down.
- Expected Results:*
- Unpolluted water should have a nitrate level of 1 ppm or less.

TEST 5: Nitrates

PROCEDURE

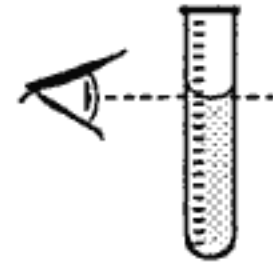1. Fill the water bottle with sample water. (This bottle enables you to fill the test tube with sample water more accurately and more safely.)
2. Fill one of the test tubes to the 2.5 mL line with water from the sample water bottle. Hold the tube at eye level and read the level from the lowest point of the meniscus. A diagram showing a test tube held vertically. A dashed horizontal line extends from the eye level of an observer on the left to the lowest point of the curved surface (meniscus) of the liquid inside the tube. The tube has a 2.5 mL mark at this level.
3. Carefully continue filling the test tube up to the 5 mL line with the mixed acid reagent.
4. Put the cap on the test tube, mix gently, and wait two minutes.
5. Using the small white measuring spoon, carefully add one level scoop (.1 g) of Nitrate Reducing Agent.
6. Put the caps back on the test tube and the bottle of Nitrate Reducing Agent. Invert the test tube gently 50 - 60 times in one minute, then wait ten minutes.
7. Put the tube into the color comparator, and match the color of the sample as closely as possible to one of the standards.
8. Record your results on the *Data Recording Form*.
9. The Nitrate Reducing Agent used in this test contains Cadmium, so the liquid waste from the test must be disposed of properly. Pour the liquid waste into the waste collection bottle contained in the kit and return it to the MWRA. **DO NOT ADD WASTE FROM ANY OTHER TEST TO THE BOTTLE, AND DO NOT FLUSH THE SAMPLE FROM THE NITRATE TEST DOWN THE DRAIN OR POUR IT ON THE GROUND.**

Upon receiving the contaminated sample, the MWRA will evaporate the liquid, collect the solid residue which will contain cadmium, and dispose of it as a hazardous waste according to state and federal regulations.

10. Clean and dry all the equipment and carefully replace everything into the kit.

Interpreting Results

The color comparator in this test measures "NO₃-N," which is "nitrogen that is in the form of nitrate." Fresh water with a nitrate level below 1 ppm is considered optimal for aquatic life, while in salt water environments, that level is lower, at about .6 ppm. Nitrate levels of about 10 ppm are unsafe for drinking.

Determining the precise level of nitrates at which problems begin to occur in nature is extremely difficult because of other factors involved. For example, if a body of water has a very low pH, it may have virtually no plant life. Plants grow best in warm water, so even low levels of nitrates in a warm, fertile environment can cause problems with excessive plant growth. Nutrients tend to have little effect in fast-moving water, so high nutrient levels in a moving brook may have no effect, while low levels in a stagnant pond may have a huge effect.

These figures from the National Oceanographic and Atmospheric Administration (NOAA) offer guidelines for understanding the effect of nitrates on water quality:

	<u>Sea Water</u>	<u>Fresh Water</u>
High quality	<.6 ppm	<1.0 ppm
Fair quality	.6 - 1.0 ppm	1.0 - 1.8 ppm
Fair to poor	1.0 - 1.8 ppm	1.8 - 2.8 ppm
Poor quality	>1.8 ppm	>2.8 ppm

Extension Activities

1. Conduct empirical studies of nitrate levels on a body of water. For example, compare nitrate levels during the winter (when they should be low) and during the summer (when more fertilizer is being used).

If you find a situation of excessive algae growth, test for both nitrates and dissolved oxygen. For nitrates, try to track the relationship between plant growth and nitrate levels. Test for DO during the day and at night. During the day, when photosynthesis is taking place, the DO level should be high, and at night, when plants are consuming oxygen, it should be lower.

2. If you find water with large quantities of algae or water with high levels of nitrates, continue testing water from farther upstream to try to identify the source of the nutrients. Look for areas where human or animal waste or agricultural runoff, such as from golf courses or farms, might enter the waterway.

TEST 6: Total Dissolved Solids (TDS) and Salinity

Brief Summary

The test uses a digital meter that measures “micromhos,” a measure of electrical conductivity. When measuring TDS (fresh water only), the meter reading must be multiplied by .5, which is a standard conversion factor. When measuring salinity, the sample must first be diluted, then multiplied by the level of dilution and the standard conversion factor.

Background

As a universal solvent, water can dissolve a wide range of substances, such as calcium, sodium, phosphorous, iron, sulfate, carbonate, nitrates, chlorides, and other ions. Solids from urban runoff often include soluble contaminants, such as road salts and fertilizers.

Although scientists do not completely understand why the ocean is salty, it is thought that some salts enter the ocean from river runoff. Another possible source is the ocean floor itself. The ocean's salinity has been consistent for as long as scientists can tell.

Some solids in water are essential to maintain health – phytoplankton, in fact, depend entirely on dissolved nitrates and phosphates – but high concentrations of solids can lower water quality. High concentrations of solids can increase turbidity, which decreases the rate of photosynthesis. These solids can also bind with toxic compounds and heavy metals, and lead to an increase in water temperature as a result of greater absorption of infrared radiation from sunlight.

Fresh water, brackish water, and sea water differ primarily in their level of total dissolved solids. Fresh water contains up to 1 part per thousand (ppt) of dissolved solids. Brackish water contains 1 - 35 ppt, and sea water contains 35 ppt (35,000 ppm). Water in protected harbors and bays that are fed by rivers often have salinity levels lower than 35 ppt. In Boston Harbor, for example, the salinity level is often around 28 ppt.

Rainwater generally has a TDS level of around 10 ppm. MWRA tap water is generally around 40 ppm. Levels of TDS greater than 500 ppm can be harmful to water systems.

Testing for Total Dissolved Solids and Salinity

Overview: The traditional test for TDS requires evaporating a precise quantity of liquid, then weighing the residue. This process, however, is slow and it requires a very precise scale.

TEST 6: TDS and Salinity

In lieu of the traditional test, therefore, this kit contains a digital tester. Two electrodes on the tester measure the water's conductivity in microsiemens (μs). A microsiemen is a micromho per centimeter, and a micromho is the inverse of a microohm (one one-millionth of an ohm). (Notice that the "mho" in micromho is "ohm" – the measure of resistance – spelled backwards.)

Dissolved solids in water raise its conductivity. Multiplying the water's conductivity by a specific factor, therefore, gives the total dissolved solids in parts per million. The factor varies according to the solids dissolved in the water, and it ranges between .5 and .9. This test uses a factor of .5. Your results will be reasonably accurate using that factor.

Length of Test: 5 minutes

Difficulty of Test: Moderate (Requires some math. Salinity test requires a dilution.)

Additional Material: A 250 ml beaker or a cup.

Protective Clothing: Rubber gloves

Suggestions:

- When testing fresh water for TDS, the procedure is as simple as putting the meter into the sample, taking a reading, and multiplying by .5. The result is TDS, measured in ppm.
- If the meter reads "1.0", the conductivity is higher than the range of the tester, and you will have to dilute the sample and follow the directions for testing brackish or sea water.
- Tap water and bottled water contain some dissolved solids (usually <100 ppm). When making a dilution you must use demineralized water that you can make by using the demineralizer bottle included in the kit.
- The test for brackish water or sea water is a little more complicated than that for fresh water. The meter registers conductivity only up to a level of 1900 μs (which equals about 950 ppm of dissolved solids). To test water with conductivity greater than 1900 μs , therefore, you must dilute the sample. We recommend a dilution of 1:50. After measuring the conductivity of the diluted sample, multiply the meter reading by the dilution to find the conductivity of the sample. (For example, if a 1:50 dilution reads 1,100 μs on the meter, the conductivity is $1100 \times 50 = 55,000\mu\text{s}$.)

ABOUT DILUTIONS

A 1:50 dilution means that there is one part of a substance per 50 parts of the total. In other words, there are 49 parts of other substances to the one part of the measured substance. To make a 1:50 dilution for this test, you should add 1 mL of sample water to 49 mL of demineralized water (NOT 1 mL of sample water to 50 mL of demineralized water).


PROCEDURE**FRESH WATER**

1. Pour some water sample into the 250 beaker or a cup to a level of 1 or 2 cm.
2. Push the white button on the digital tester to turn it on. When it is ON, it will read 000 μ s.
3. Put the tip of the digital TDS tester into the sample water. **DO NOT SUBMERGE THE TESTER ABOVE THE BROWN LINE.**
4. Multiply the meter reading by .5. The result is the total dissolved solids (TDS) in parts per million (ppm).
5. Record your results on the *Data Recording Form*.
6. Wash the meter's electrodes with tap water, and empty and rinse the beaker.
7. Push the white button to turn the meter OFF. When it is OFF, the digital face will be blank.

BRACKISH WATER AND SEA WATER

1. Using demineralized water and the graduated cylinder, make a 1:50 dilution of your sample water by filling the graduated cylinder to the 49 mL mark with demineralized water then adding 1 mL of sample water. When pouring water from the demineralized water bottle, **DO NOT REMOVE THE CAP**; pull out the cap and squeeze the bottle.

To fill the cylinder to the proper level, hold it at eye level and read the water level from the lowest point of the meniscus.



2. Pour the diluted sample from the graduated cylinder into the 250 ml beaker or cup.

TEST 6: TDS and Salinity

MAKING DEMINERALIZED WATER

The test kit contains a demineralized water bottle, which is a plastic squeeze bottle with a pull-out cap and a green resin inside. The resin is a demineralizing agent, and the cap contains a special filter so the resin will not escape the bottle. When making a dilution for this test, only use demineralized water.

If the demineralizer bottle is not full, follow this procedure. If it is full, go to #1 of the procedure.

- a. Fill the demineralized water bottle with fresh (tap) water.
- b. Put the cap on the bottle, be sure the spout is closed, and shake it for 30 seconds.
- c. Leave the bottle full when storing it in the kit. (NOTE: Do not let the "ion exchange resin" dry out.)
- d. If you notice the "ion exchange resin" changing colors from dark green to amber yellow, notify the MWRA that it is time to replace the resin.

3. Push the white button on the digital tester to turn it on. When it is ON, it will read 000 μ s.
4. Put the tip of the digital TDS tester into the diluted sample water. DO NOT SUBMERGE THE TESTER ABOVE THE BROWN LINE.
5. Multiply the meter reading by the amount of dilution (50 for a 1:50 dilution) to find the total conductivity of the sample in microsiemens (μ s).
6. Multiply the conductivity (the answer from #5) by .5 (which is a standard factor for converting conductivity to salinity). The answer will be salinity in parts per million (ppm).
7. Convert the salinity in parts per million (ppm) to salinity in parts per thousand (ppt) by dividing by 1000.
8. Record your results on the *Data Recording Form*.
9. Wash the meter's electrodes carefully with tap water; empty and rinse the beaker.
10. Push the white button to turn the meter OFF. When it is OFF, the digital face will be blank.

Interpreting Results

For fresh water, the total dissolved solids count will tell you how many salts and minerals are dissolved in the water. (The TDS count is different from the turbidity level in that turbidity refers to undissolved solids.)

For sea or brackish water, the TDS level determines the salinity (saltiness) of the water. In estuaries, bays, tidal rivers, and salt water marshes, the salinity level will change with the ebb and flow of the tide and the amount of fresh water that runs into these waters.

0 ppm		Demineralized water or "pure" water
10 ppm		Rain water
40 ppm		Tap water
500 ppm		Harmful to plumbing in water systems
<1000 ppm	(<1 ppt)	Fresh water
1000-35,000 ppm	(1 - 35 ppt)	Brackish water
35,000 ppm	(35 ppt)	Sea water

Sample Calculation (Brackish water)

Sample meter reading for a 1:50 dilution = 675 μ s

1. Multiply by the level of dilution

$$675 \times 50 = 33,750 \mu\text{s}$$

2. Multiply by the standard factor of .5

$$33,750 \times .5 = 16,875$$

3. Put the results into the proper units

$$\text{Salinity} = 16,875 \text{ ppm OR } 16.9 \text{ ppt}$$

(Both of these are correct. TDS is generally measured in ppm; salinity is generally measured in ppt.)

Extension Activity

1. Follow an estuarial river or stream as far as you can. At the inland end of the estuary the water will contain <500 ppm of total dissolved solids. At the ocean end, it will contain around 35 ppt of salinity (or around 28 ppt in the harbor). Plot the concentrations of salinity throughout the mixing zone.

TEST 7: TURBIDITY

Brief Summary

The measure of water's cloudiness. This test measures turbidity by comparing a turbid sample with a clear sample, then adding drops of a special clouding solution to the clear sample until it appears as cloudy as the turbid sample. The results are measured in Jackson Turbidity Units (JTUs).

Background

Turbidity is a measurement of how cloudy water appears. Technically, it is a measure of how much light passes through water, and it is caused by suspended solid particles that scatter light. These particles may be microscopic plankton, stirred up sediment or organic materials, eroded soil, clay, silt, sand, industrial waste, or sewage. Bottom sediment may be stirred up by such actions as waves or currents, bottom-feeding fish, people swimming or wading, or storm runoff.

Clear water may appear cleaner than turbid water, but it is not necessarily healthier. Water may be clear because it has too little dissolved oxygen, too much acidity or too many contaminants to support aquatic life. Water that is turbid from plankton has both the food and oxygen to support fish and plant life. However, high turbidity may be a symptom of other water quality problems.

Effects of Turbidity

- Turbidity diffuses sunlight and slows photosynthesis. Plants begin to die, reducing the amount of dissolved oxygen and increasing the acidity (decaying organic material produces carbonic acid, which lowers the pH level). Both of these effects harm aquatic animals.
- Turbidity raises water temperature because the suspended particles absorb the sun's heat. Warmer water holds less oxygen, thus increasing the effects of reduced photosynthesis. In addition, some aquatic animals may not adjust well to the warmer water, particularly during the egg and larval stages.
- Highly turbid water can clog the gills of fish, stunt their growth, and decrease their resistance to diseases.
- The organic materials that may cause turbidity can also serve as breeding grounds for pathogenic bacteria. When drinking water reservoirs are turbid, the water treatment plant usually filters the water before disinfecting it.

TEST 7: Turbidity

- Industrial processes and food processing require clear water. Turbid water can clog machines and interfere with making food and beverages.

Causes of Excessive Turbidity

- Algae blooms caused by excess nitrogen (from agricultural runoff, septic tanks, or sewage outflows).
- Weather and seasons can contribute to turbidity. Water that may be clear in the spring may grow turbid by August because of plant growth enhanced by warmer days and longer sunlight hours. Similarly, heavy rains or spring snow melts can stir up soil and sediments, increasing turbidity.
- Contamination from sewage, industrial waste, or urban runoff.

Standard Measures of Turbidity

There are several ways to test turbidity and several ways to standardize the results. The most scientific measurement uses a *nephelometer* to electronically measure the amount of light scattered by the suspended particles in the sample, reporting the results in Nephelometric Turbidity Units (NTUs). (*Nephele* is the Greek word for “cloud”; *metric* means “measure.” *Nephelometric*, therefore, means “measuring cloudiness.”)

Using a Secchi Disk (a 20 cm diameter disk with black and white quadrants), the observer notes how deep the disk can be lowered in the water until it disappears from sight and reports the results in meters.

A more versatile test for the classroom and shallow water uses two tubes with targets at the bottom. The observer compares the fuzziness of the target through clear water and sample water and reports the results in Jackson Turbidity Units (JTUs), named after the now-archaic method of holding a long glass “Jackson” tube over a lit candle. This test measures turbidity in JTUs.

A Note On Color

Turbidity can cause color in water, but color itself is not turbidity. Color may be caused by dissolved substances or reflections from rocks and vegetation.

Testing for Turbidity

Overview: In this test, you will pour measured amounts of your sample water and clear water into identical cylinders, each with a black dot at the bottom. You will add small increments of a turbidity reagent to the clear water until the dot appears as cloudy as the dot in the sample

water. You will then record the amount of reagent you added, and convert that amount to Jackson Turbidity Units (JTUs). The test relies on observation and comparison, and can be subjective. Several groups should perform this test to confirm the results. If the results vary widely, take a class average.


Length of Test: 5 minutes

Difficulty of Test: Simple

Protective Clothing: Rubber gloves

PROCEDURE

1. Fill one turbidity tube to the 50 mL line with clear water, either from the tap or bottled water.
2. Fill the other turbidity tube to the 50 mL line with the sample water.
3. Hold the tubes side-by-side in the light, and look through them vertically (from the top down). Compare their cloudiness by observing the fuzziness of the black dot at the bottom of the tube.
4. Shake the Standard Turbidity Reagent vigorously and add 0.5 mL (which is marked by a line on the pipette) to the tube of *clear water*. The reagent will make the clear water turn slightly cloudy or turbid. Stir the water in each tube with the stirring rods.
5. Compare the turbidity again by looking down into the water in each tube at the black dot. If the sample water is still more turbid than the clear water, continue adding the Turbidity Reagent by 0.5 mL increments until both tubes appear equally cloudy.
6. Compute the Jackson Turbidity Units of the sample. Each 0.5 mL of Turbidity Reagent that you added to the clear water equals 5 Jackson Turbidity Units.

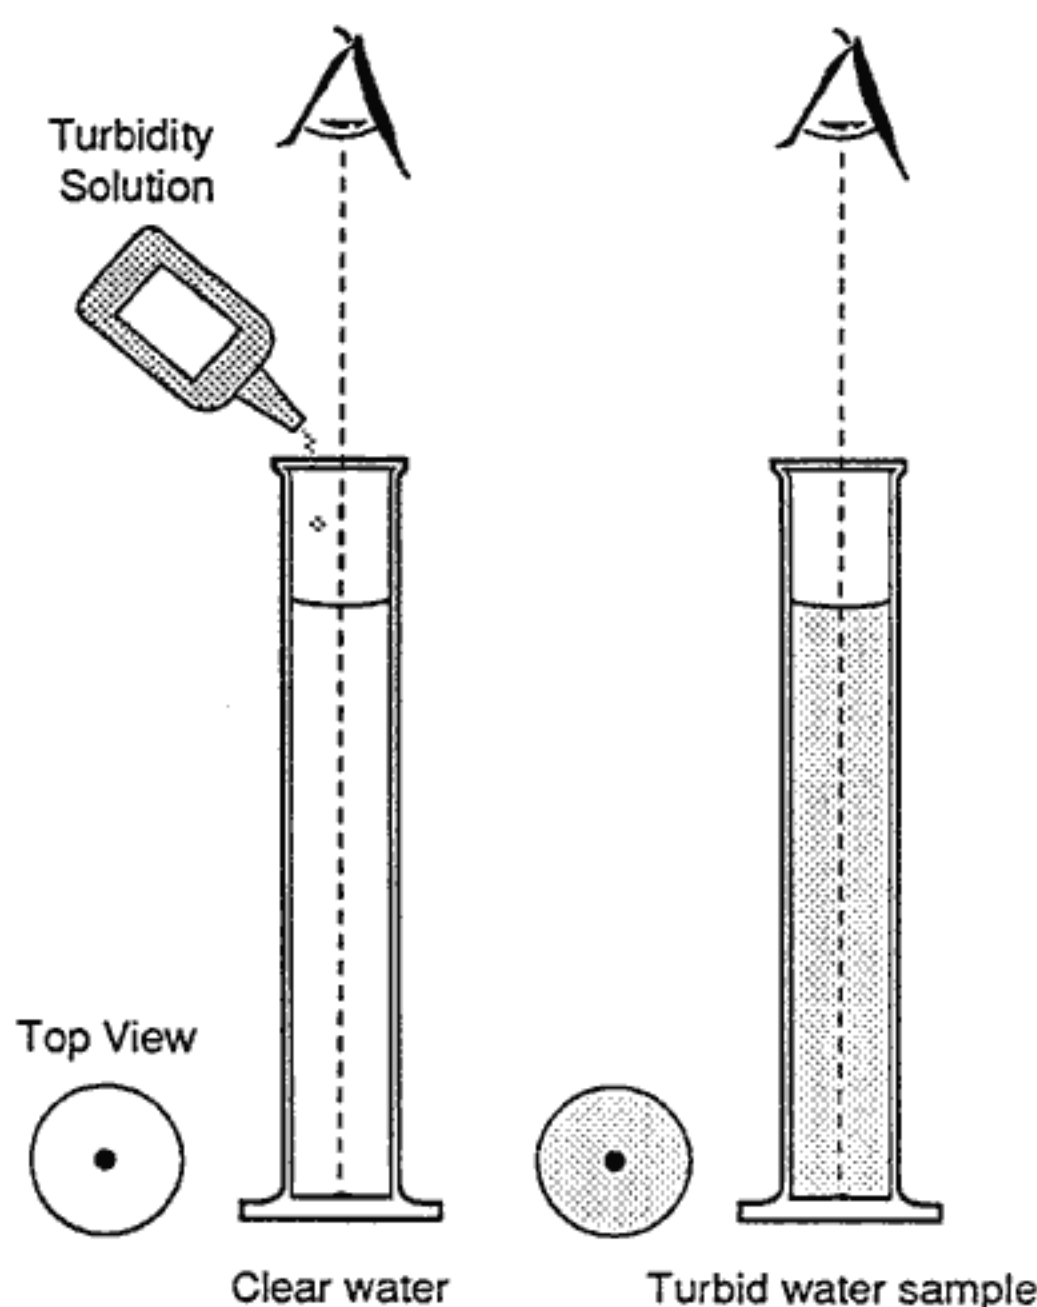

$$.5 \text{ mL} = 5 \text{ JTU}$$

TEST 7: Turbidity

NOTE: *If your sample is so turbid that you cannot see the dot when the tube is filled to the 50 mL line, only add 25 mL of sample water to the tube. With half as much sample liquid, each 0.5 mL of Turbidity Reagent equals 10 JTUs.*

7. Record your results on the *Data Recording Form*.
8. Dispose of the waste liquid by pouring it down the drain.
9. Wash, dry and put away the test equipment.

Interpreting Results

- Do you consider the amount of turbidity you found to be a sign of a healthy or unhealthy water system?
- What do you think accounts for the level of turbidity you found?
- If you find high turbidity, look around the site to try to find the source of turbidity
- Would you expect to find more or less turbidity during another season?

Water bodies with only sparse plant and animal life	0 JTU
Drinking water	<0.5 JTU
Typical Groundwater	<1.0 JTU

Extension Activities

1. Look at your water sample under a microscope. Can you detect plankton? Plant debris? Sand? Sediment? From what you observe, discuss the sources and causes of the turbidity. Are they natural or human-made? Beneficial or harmful? Could people do anything to decrease the turbidity? Should we?
2. Experiment with other methods of testing turbidity. If you have time and opportunity during the site visit, try to measure the turbidity using a Secchi Disk and compare your results.

TEST 8: Total Coliform Bacteria

Brief Summary

A simple presumptive test that indicates the presence of total coliform bacteria in a water sample. After 48 hours of incubation at room temperature, a lactose broth solution changes colors from purple to yellow if coliform is present.

Background

Coliform is a group of generally nonpathogenic bacteria that live throughout the environment. One type of coliform, fecal coliform, lives in the intestinal tract of warm blooded animals and helps digest foods. It is not harmful in and of itself, but it serves as an *indicator* of the presence of pathogenic bacteria. Fecal coliform bacteria are abundant in human feces, so they are easy to find whenever sewage is present. If you find coliform bacteria in water, you can be sure that other bacteria, viruses or parasites are also present. Some of these might cause diseases.

Testing for particular pathogens in water is usually difficult and time consuming. Coliform bacteria, however, are fairly easy to test for, and they usually occur with other pathogens. That is why people who monitor water quality use this group as an indicator. In water with high total coliform counts, about 10% of the coliform will be fecal coliform.

This kit uses a simple presumptive test for the presence of total coliform bacteria. The test uses a lactose broth that changes color from purple to yellow in the presence of coliform bacteria. Since it is a presumptive test, it is impossible to calculate the quantity of coliform in the water, but this test does not require special equipment or incubation.

WATER-BORNE DISEASES ARE STILL WORLDWIDE KILLERS

According to the World Health Organization, throughout the world, 4.3 million people, mostly children, die every year from diarrhea caused by water-borne bacteria! That is more than the population of Norway. Other water-borne diseases, such as typhoid, cause seven million deaths and seven billion illnesses each year. Proper water treatment and disinfection of sewage prevent large-scale epidemics.

TEST 8: Total Coliform Bacteria

Sources of Coliform

- Combined sewage systems carry both sanitary wastes - from toilets, washers and sinks - and storm runoff. During rains, sewer pipes are too small to handle the combined flow, so part of it is diverted into a river, bay or harbor. This storm overflow contains untreated or inadequately treated sewage.
- Agricultural and rural runoff carries wastes from birds and animals.
- Improperly working septic tanks and cesspools can allow untreated wastewater to seep into the groundwater.

Testing for Total Coliform Bacteria

<i>Overview:</i>	The conventional test for total coliform bacteria requires special equipment, precise lab procedures, incubation, and culture counting. This kit contains only a simple presumptive test for total coliform bacteria. It does not measure the type or quantity of coliform bacteria, only their presence. The coliform testing tubes contain a purple-colored lactose broth that is sensitive to coliform bacteria. If coliform bacteria are present, the purple liquid will turn yellow within 48 hours when incubated at room temperature.
<i>Length of Test:</i>	2 minutes in the field; 48 hours incubation time.
<i>Difficulty of Test:</i>	Simple
<i>Protective Clothing:</i>	Rubber gloves
<i>Expected Results:</i>	Most natural water sources will contain some coliform bacteria, so expect a positive result. Tap water and bottled water should not contain any coliform bacteria. If a tap water sample tests positive, let the water run for a few minutes and test it again. If it continues to test positive, you may want to call the health department. If bottled water from a supermarket tests positive, retest it. If it continues to test positive, report it to a local health official. If bottled water from your water cooler tests positive, retest it. Your water cooler may need disinfecting, and your water distributor can provide instructions. After cleaning the cooler, test the water again using another bottle of water.

PROCEDURE

1. The coliform tubes are capped and about one-half full of purple liquid. Before removing the cap, write the date, time, and source of the water sample on the tube itself. (Either use tape or a permanent marking pen.)
2. Remove the cap from one of the coliform testing tubes. Fill the tube with your water sample to about 1 cm from the top. (The tube has a small shoulder at that level.)
3. Replace the cap.
4. Leave the tube in a safe, warm place for 48 hours.

NOTE: *Cool temperatures will not change the results of the test; temperatures of less than 20°C (68°F), however, may slow down the color change if coliform is present.*

5. After 48 hours, examine the tube and record the results on the *Data Recording Form*.

Purple = No coliform bacteria present

Yellow = Coliform bacteria in the water sample

6. Add several drops of chlorine bleach to the tube to kill the bacteria. Flush the contents of the tube down the drain and discard the tube. DO NOT dispose of the sample without first disinfecting it.

Interpreting Results

Positive results indicate the presence of total coliform bacteria from warm-blooded animals and various soil organisms. People should not drink that water! Total coliform counts are usually about 10 times higher than fecal coliform. Thus, if you find total coliform bacteria, your sample probably contains fecal coliform and other disease-carrying pathogens. You cannot tell whether fecal coliform bacteria came from human sewage or animal waste without performing other laboratory tests.

Extension Activities

1. Rinse your hands in clean water (water not contaminated with coliform), then test that wash water. Were you carrying coliform on your hands? The results might be a strong argument in favor of regular hand washing.
2. Disinfect a sample of coliform-contaminated water and test it again. You may disinfect it by boiling the water sample or adding a drop of chlorine bleach. Try several different disinfection techniques and see if they all work equally well.

VII

FORMS AND HANDOUTS

Student Safety

Field Safety Practices

- No pushing or shoving near the water.
- No running near the water.
- No wading or swimming in the water.
- No leaning over the rails on bridges.
- Stay off roadways.
- Wear warm clothes.

Laboratory Safety Practices

- Wear protective clothing: lab aprons, gloves and eye protection. You will be handling some breakable bottles, test tubes and other equipment. You will also be handling some hazardous chemicals.
- Treat all samples as if they were contaminated.
- Treat all chemicals as if they were dangerous.
- Never taste a laboratory sample.
- Wash hands thoroughly after using chemicals.
- Never put hands in mouth during experiments.
- Do not shake, splash or spill the chemicals.
- Stay calm. Do not clown around.
- Dispose of chemicals properly.

Recommended Clothing

- Jacket, hat and gloves (cool weather)
- Waterproof boots (cool weather) or old sneakers (warm weather)
- Clothes that you do not mind getting wet or dirty

STAY WARM!!!

Site Survey Form

Class _____ Date _____

Location of site _____

Time of Day: _____ High Tide/Low Tide (if relevant): _____

Weather:	Current	Recent (within last 4 days)
Wind	_____	_____
Precipitation	_____	_____
Temperature	_____	_____

Land use within the watershed:

- ___ residential (___ single family ___ multifamily)
- ___ commercial (stores and businesses)
- ___ industry and manufacturing
- ___ agricultural (___ grazing ___ crops)
- ___ marine/nautical industries

Location of: (if known)

industrial discharges _____

storm drains _____

Combines sewer overflows (CSOs) _____

Water type:

___ Fresh ___ Brackish ___ Sea

Water use within the area:

- ___ recreation (swimming, boating, fishing)
- ___ drinking water supply
- ___ industry
- ___ other

Physical Observations of the water:

___ Clear	___ Cloudy	___ Color
___ Wave height	___ Approximate Current	___ Visible oil slick
___ Litter or Debris	___ Overhanging trees	___ Odor

Other descriptions of the water:

Land formations in the area:

___ mountains ___ hills ___ wetlands ___ forests ___ meadows
___ seashore ___ marsh (___ seawater ___ brackish ___ freshwater)

Bank or shore:

___ Soil ___ Clay ___ Litter ___ Sand ___ Gravel ___ Rock

Steepness of bank: _____

Vegetation: _____

Signs of erosion: _____

Wildlife:

___ fish ___ birds ___ insects ___ wildlife ___ domestic animals

Other observations:

Prediction Form

Class _____

Date _____

Location of site _____

I (We) expect the water at this site to have the following conditions:

1. The pH level will be ___high (8.0 up) ___neutral (6.0 -7.9) ___low (below 6.0) I predict this because:

2. The Dissolved Oxygen (DO) level will be
___ high (it will support abundant, healthy fish life)
___ average (it will support fish life as long as temperatures remain average)
___ low (it will not support healthy fish life)
I predict this because:

3. The Biochemical Oxygen Demand (BOD) will be
___ high (there will not be much oxygen left after 5 days)
___ average (there will be adequate oxygen left after 5 days)
___ low (not much oxygen will be used up in 5 days)
I predict this because:

4. The water temperature will be about ___°C (___°F) because:

5. (fresh water) The Total Dissolved Solids (TDS) will be _____ because:

6. (sea water) The salinity level will be
___ below 200 ppm ___ between 10,000 and 35,000 ppm
___ between 200 and 5,000 ppm ___ 35,000 ppm
___ between 5,000 and 10,000 ppm
I predict this because:

7. I predict there ___ will ___ will not be total coliform present because:

8. I predict the nitrogen level will be ___ low (<.2 ppm) ___ average (<1 ppm)
___ high (>1 ppm) because:

9. I predict the turbidity level will be ___ low ___ average ___ high
I predict this because:

Data Recording Form

Group members _____

Date _____ Location of site _____

Temperature

Air Temperature: ___°C ___°F

Water Temperature: ___°C ___°F

Draw a simple map of the site and mark the location(s) where you took the temperature. Include the depths at which you took the temperature and the temperature itself.

Did you have any difficulty taking the temperature because of currents, waves, difficult access on the banks?

Did you see anything at your site that might cause thermal pollution (unnatural water heating), such as a storm drain or an industrial discharge pipe?

pH

1. What is your sample's pH? _____
2. Did you notice anything at your site that might lead to this pH level?

Dissolved Oxygen (DO)

1. What was the level of Dissolved Oxygen in your sample? _____ ppm
2. What is the 100% oxygen saturation level of your sample water? (To be read from the chart on page 40.)

3. What is the percentage of oxygen saturation of your sample (#1 + #2) = _____%
4. How might you account for this level of DO?

Biochemical Oxygen Demand (BOD)

1. Parts per million of dissolved oxygen: *(Tests on days 2, 3 and 4 are optional)*

Day 1	___ ppm DO (from DO #1)	
Day 2	___ ppm DO	___ BOD (DO day 1 - DO day 2)
Day 3	___ ppm DO	___ BOD (DO day 1 - DO day 3)
Day 4	___ ppm DO	___ BOD (DO day 1 - DO day 4)
Day 5	___ ppm DO	___ BOD (DO day 1 - DO day 5)
2. Graph the BOD on a piece of graph paper.
3. What might account for the rate of oxygen demand?

Nitrates

1. What was the nitrate concentration of your water sample: _____ ppm
2. Did you notice anything at your site that might lead to this nitrogen concentration?

Total Dissolved Solids and Salinity

FRESH WATER

1. What was the meter reading? _____ μs
2. What is the level of total dissolved solids? (#1 X .5) _____ ppm

SEA WATER and BRACKISH WATER

1. What was your level of dilution? ____:____
2. What was the meter reading? _____ μs
3. What is the level of salinity in ppm? (level of dilution X meter reading X .5) _____ ppm
4. What is the level of salinity in parts per thousand (ppt)? (#3 + 1000) _____ ppt

Turbidity

1. Does the water appear to be turbid (cloudy)? _____
2. How many 0.5 mL of turbidity reagent did you add before the clear water looked as cloudy as the water sample? _____
3. What was the turbidity in Jackson Turbidity Units (JTUs)? (Answer to #2 X 5) _____ JTU
4. Did you observe anything at your site that might make the water turbid? If so, what?
5. If your sample was turbid, how long has it been since the last large storm?

Total Coliform Bacteria

1. After 48 hours, what color was your sample? _____ blue/purple _____ yellow
2. Did your water sample have coliform bacteria present? _____ yes _____ no
3. Do you notice anything at your site that might account for the presence or absence of coliform bacteria?

VIII

REFERENCES

- Farthing, P., et. al., *The Stream Scene: Watersheds, Wildlife and People*, Watershed Education Project, 1992. (Order from the Oregon Department of Fish and Wildlife, P.O. Box 59, Portland, OR 97207.)
- Fisher, Nina, ed., *The Monitor's Handbook*, LaMotte Company, 1992. (Order from LaMotte Company, P.O. Box 329, Chestertown, MD 21620.)
- Jacobson, Cliff, *Water, Water Everywhere*, volumes 1 - 3, Hach Company, 1983, 1991. (Order from Hach Company, P.O. Box 389, Loveland, CO 80539.)
- Mitchell, M.K. and Stapp, W.B., *Field Manual for Water Quality Monitoring: An Environmental Education Program for Schools*, Thomson-Shore, Inc., Dexter, Michigan, 1992. (Order from William B. Stapp, 2050 Delaware Avenue, Ann Arbor, MI 48103.)
- Moe, Martin, *The Marine Aquarium Handbook*, Green Turtle Publications, 1982, 1992. (Order from Green Turtle Publications, P.O. Box 17925, Plantation, FL 33318.)
- U.S. Department of Interior Geological Survey, *A Primer on Water Quality*, U.S. Government Printing Office, 1965 (fifth printing, 1984). (Order from the Distribution Branch, U.S. Geological Survey, 604 South Pickett Street, Alexandria, VA 22304.)
- Weiss, Howard M. and Dorsey, Michael W., *Investigating the Marine Environment*, volumes 1 - 3, Project Oceanology, 1979. (Order from Project Oceanology, Avery Point, Groton, CT 06340.)

IX

CONTENTS OF THE KIT

<i>Test 1:</i> Temperature	shielded thermometer
<i>Test 2:</i> pH	2 test tubes with caps 50 ml wide range indicator 2 octet color comparators
<i>Test 3:</i> Dissolved Oxygen	sampling bottle 25 ml of manganous sulfate 25 ml of alkaline potassium iodide azide 25 ml of sulfuric acid 25 ml of starch indicator solution 50 ml of sodium thiosulfate titration tube with cap titrator
<i>Test 4:</i> BOD	5 additional DO sampling bottles
<i>Test 5:</i> Nitrates	plastic sampling bottle 100 ml mixed acid reagent nitrate reducing agent (powder) .1g measuring spoon test tube with cap octet color comparator
<i>Test 6:</i> Turbidity	2 cylinders with dots in the bottom 50 ml standard turbidity reagent stirring rod tube brush
<i>Test 7:</i> TDS and Salinity	TDS Tester (digital meter) graduated cylinder (for salinity dilution) eye dropper (for salinity dilution) demineralized water bottle
<i>Test 8:</i> Coliform	6 lactose broth tubes
Miscellaneous	neutralizing liquid for DO and BOD tests bleach for disinfecting coliform samples waste collection bottle (for nitrate test) empty bottles for student practice MSDS booklet



PURCHASING YOUR OWN KIT

Kits may be purchased directly from:

NOTE: *Kits include everything except the lactose broth tubes for testing total coliform bacteria. They must be purchased separately from Connecticut Valley Biological Supply.*

LaMotte Company

P.O. Box 329
Chestertown, MD 21620
(301) 778-3100
(800) 344-3100

Name: MWRA Water Quality Testing Kit
Stock #: 5863
Cost: \$295.00 excluding shipping
Discount: \$280.25 for purchases of ten or more

Connecticut Valley Biological Supply

82 Valley Road
Box 326
Southampton, MA 01073
(413) 527-4030
(800) 628-7748

Name: Coliform Indicator Broth Tubes
Stock #: CS-802-T
Cost: 1 - 24 tubes \$1.00/tube
 25 - 100 tubes \$.75/tube
 101 - 499 tubes \$.60/tube
 500+ tubes \$.50/tube

Dissolved Oxygen

DISSOLVED OXYGEN

Oxygen is critical to the survival of aquatic plants and animals, and a shortage of dissolved oxygen is not only a sign of pollution, it is harmful to the fish. Some aquatic species are more sensitive to oxygen depletion than others, but some general guidelines to consider when analyzing test results are:

5–6 ppm	Sufficient for most species
<3 ppm	Stressful to most aquatic species
<2 ppm	Fatal to most species

Because of its importance to the fish's survival, aquaculturists, or "fish farmers," and aquarists use the dissolved oxygen test as a primary indicator of their system's ability to support healthy fish.

WHERE DOES THE OXYGEN COME FROM?

The oxygen found in water comes from many sources, but the largest source is oxygen absorbed from the atmosphere. Wave action and splashing allows more oxygen to be absorbed into the water. A second major source of oxygen is aquatic plants, including algae; during photosynthesis plants remove carbon dioxide from the water and replace it with oxygen.

Absorption

Oxygen is continuously moving between the water and surrounding air. The direction and speed of this movement is dependent upon the amount of contact between the air and water. A tumbling mountain stream or windswept, wave covered lake, where more of the water's surface is exposed to the air, will absorb more oxygen from the atmosphere than a calm, smooth body of water. This is the idea behind aerators; by creating bubbles and waves the surface area is increased and more oxygen can enter the water.

Photosynthesis

In the leaves of plants one of the most important chemical processes on Earth is constantly occurring-photosynthesis. During daylight, plants constantly take carbon dioxide from the air, and, in the presence of water, convert it to oxygen and carbohydrates, which are used to produce additional plant material. Since photosynthesis requires light, plants do not photosynthesize at night, so no oxygen is produced. Chemically, the photosynthesis reaction can be written as:



WHERE DOES THE OXYGEN GO?

Once in the water, oxygen is used by the aquatic life. Like land animals, fish and other aquatic animals need oxygen to breathe or respire. Oxygen is also consumed by bacteria to decay, or decompose, dead plants and animals.

Respiration

All animals, whether on land or underwater, need oxygen to respire, and grow and survive. Plants and animals respire throughout the night and day, consuming oxygen and producing carbon dioxide, which is then used by plants during photosynthesis.

Decomposition

All plant and animal waste eventually decomposes, whether it is from living animals or dead plants and animals. In the decomposition process bacteria use oxygen to oxidize, or chemically alter, the material to break it down to its component parts. Some aquatic systems may undergo extreme amounts of oxidation, leaving no oxygen for the living organisms, which eventually leave or suffocate.

OTHER FACTORS

The oxygen level of a water system is not only dependent on production and consumption. Many other factors work together to determine the potential oxygen level, including:

- Salty vs. fresh water: Fresh water can hold more oxygen than salt water.
- Temperature: Cold water can hold more oxygen than warm water.
- Atmospheric pressure (Altitude): The greater the atmospheric pressure the more oxygen the water will hold.


Dissolved Oxygen

TESTING DISSOLVED OXYGEN


Dissolved oxygen is often tested using the Azide modification of the Winkler method. When testing dissolved oxygen it is critical not to introduce additional oxygen into the sample. Many people avoid this problem by filling the sample bottle all the way and allowing the water to overflow for one minute before capping. The first step in a DO titration is the addition of Manganous Sulfate Solution (4167) and Alkaline Potassium Iodide Azide Solution (7166). These reagents react to form a precipitate, or floc, of manganous hydroxide, $Mn(OH)_2$. Chemically, this reaction can be written as:




Immediately upon formation of the precipitate, the oxygen in the water oxidizes an equivalent amount of the manganous hydroxide to manganic hydroxide. In other words, for every molecule of oxygen in the water, one molecule of manganous hydroxide is converted to manganic hydroxide. Chemically, this reaction can be written as:

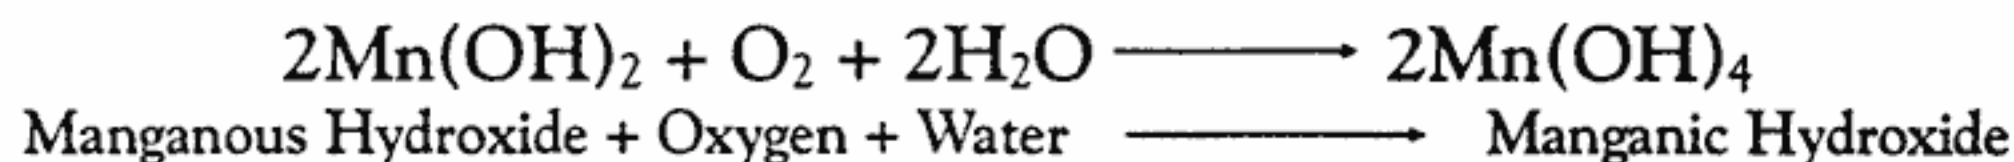

After the precipitate is formed, a strong acid, such as Sulfamic Acid Powder (6286) or Sulfuric Acid, 1:1 (6141) is added to the sample. The acid converts the manganic hydroxide to manganic sulfate. At this point the sample is considered "fixed" and concern for additional oxygen being introduced into the sample is reduced. Chemically, this reaction can be written as:

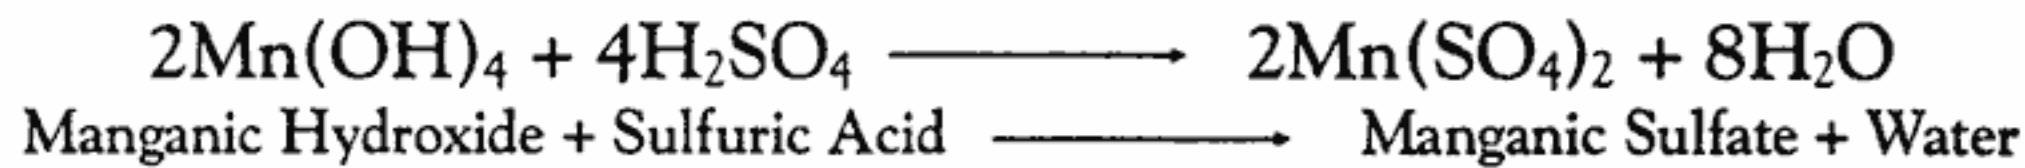

Simultaneously, iodine from the potassium iodide in the Alkaline Potassium Iodide Azide Solution is replaced by sulfate, releasing free iodine into the water. Since the sulfate for this reaction comes from the manganic sulfate, which was formed from the reaction between the manganic hydroxide and oxygen, the amount of iodine released is directly proportional to the amount of oxygen present in the original sample. The release of free iodine is indicated by the sample turning a yellow-brown color. Chemically, this reaction can be written as:

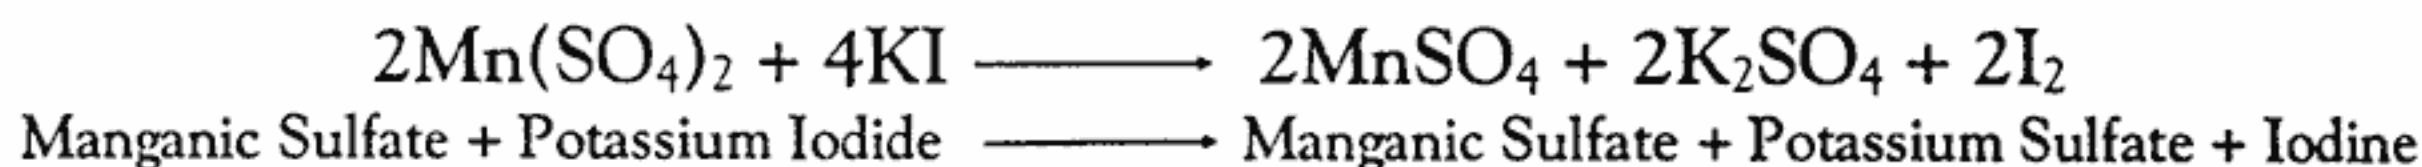

The final stage in the Winkler titration is the addition of sodium thiosulfate. The sodium thiosulfate reacts with the free iodine to produce sodium iodide. When all the iodine has been converted the sample changes from yellow-brown to colorless. Often a starch indicator is added to enhance the final endpoint. Chemically, this reaction can be written as:



LaMOTTE COMPANY
PO Box 329 • Chestertown • Maryland • 21620
800-344-3100 • 410-778-3100 (IN MD)